



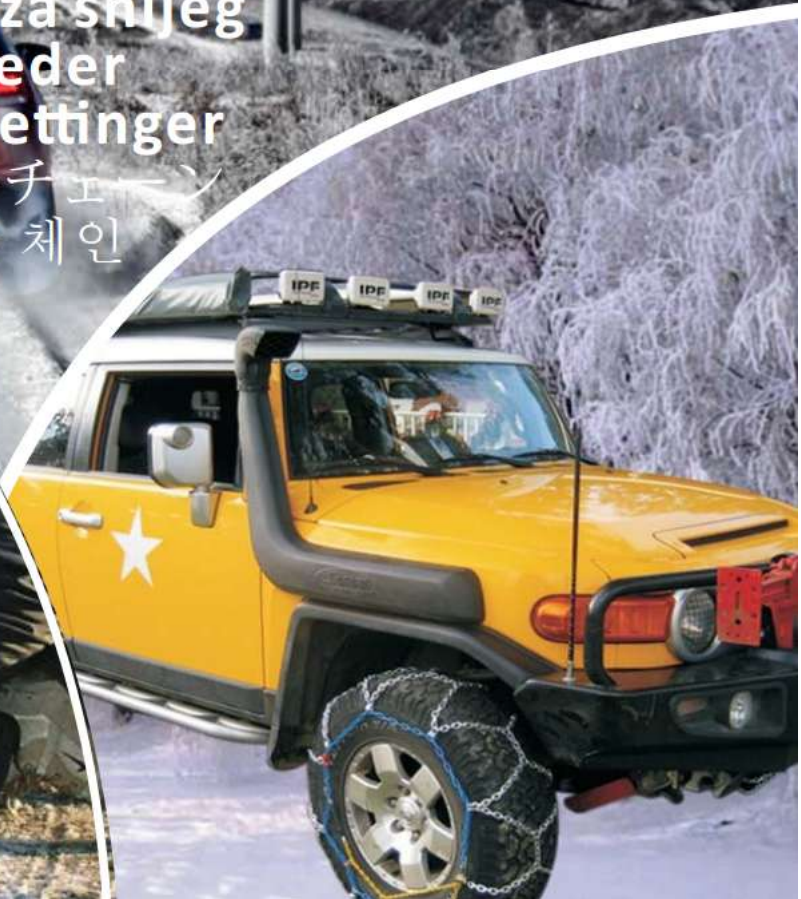

atli

雪地防滑鏈
Snow Chains
Chaînes à neige
Schneeketten
Cadenas de nieve
Catene da neve
Цепи противоскольжения
Łańcuchy śniegowe
Lanci za snijeg
Snekæder
Snøkjettinger
スノーチェーン
스노우 체인

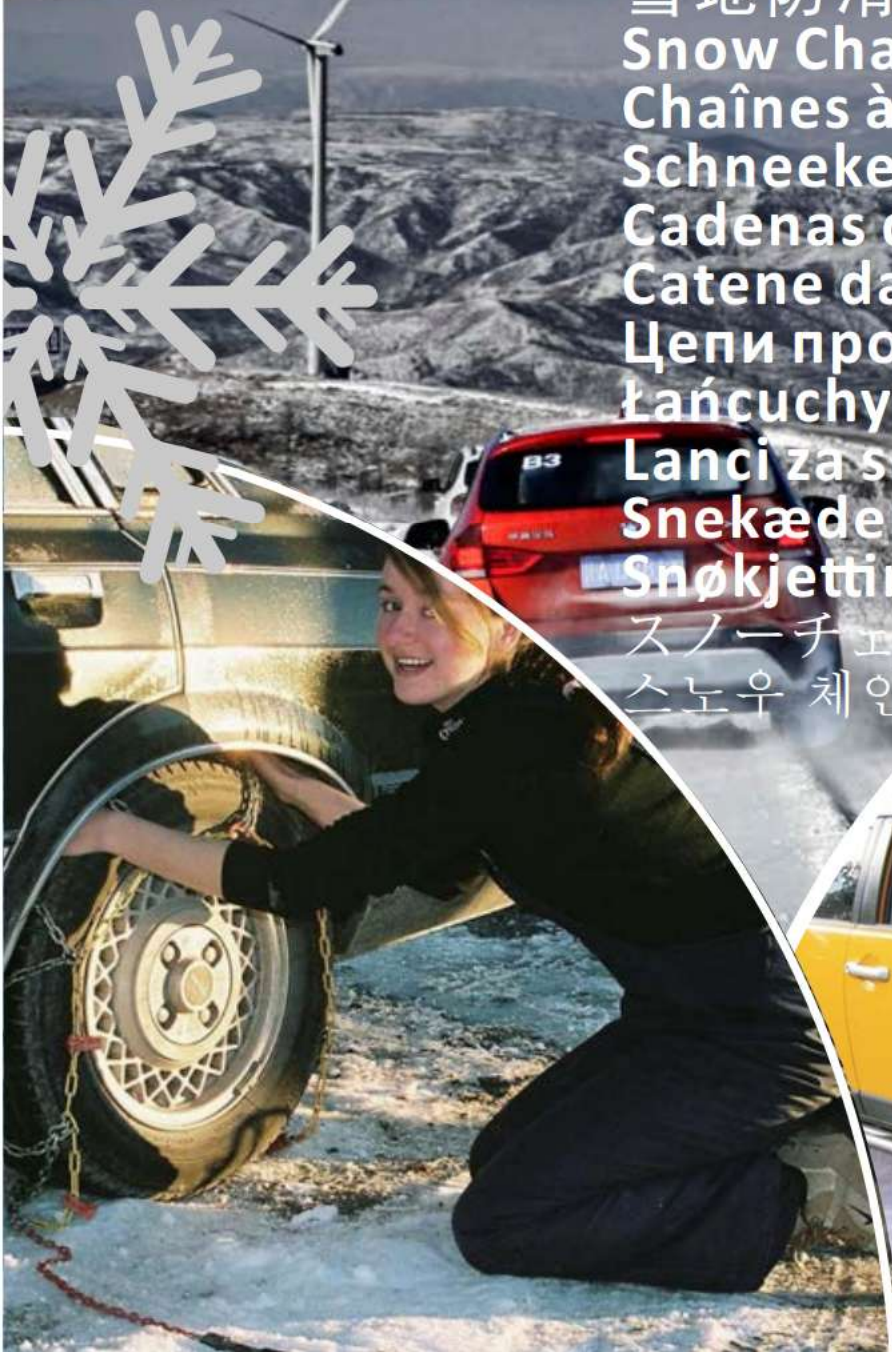

Atli Industry Co., Limited is a Group company located beside the beautiful West Lake, Hangzhou, Zhejiang. It takes 45 minutes from Shanghai to Hangzhou by high speed train, and 155km far from Hangzhou to Ningbo port.

Atli Chain industry (Jinhua) is manufacturer of snow chains, welded chains, chain accessories, located in Jinhua, Zhejiang.

Our main snow chains including diamond steel tire chains, (KNT7mm, KNS9mm, KN12mm, WDT11mm, WDS12mm, WD16mm), Truck chains, tractor chains, ATV tire chains, forklift tire chains, ladder tire chains, ect. We also produce TPU tire chains, Auto snow sock (fabric /textile snow chains), shoe chains, anti skid board, emergency tire chain

Atli own brand ATLI in USA, and ATLIPRO in Europe. We also OEM for many customers from Germany, France, Italy, Spain, U.K.Poland, U.S.A, Russia, Iran, Chile, Japan, Korea, Australia, ect.

Create Value for customers is our goal.



Table of Contents

Passenger Car /4x4 Snow Chains

Rules For Using Tire Chains	01
Diamond Tire Chain Exploded View	02
Fitting Chart Of Quick Mounting Passenger Tire Chains	03
Quick Mounting Passenger Tire Chains	04
Quick Mounting 4x4/SUV/WD/Pick Up/Light Truck Tire Chains	05
Manual For Quick Mounting Tire Chains	6-7
TPU Snow Chain	08
Type PL Passenger Car Chain	09
Type R & Type RP Snow Chain	10
Cable Passenger Car Chain	11
Emergency Tire Chain	12
Tyre Grip Tracks	12
Shoe Anti Skid Chain	12
Fit Chart Of Fabric/Textile Auto Snow Sock	13
Fabric/Textile Auto Snow Sock	14

Truck / Bus /SUV Tire Chains

Single Regular Truck Chains 22's	15
Single Reinforced Truck Chains 28's	16
Wide Base Regular Truck Chains 32's	17
Wide Base Reinforced Truck Chains 38's	17
Dual-Triple Regular Truck Chains 42's	18
Dual-Triple Reinforced Truck Chains 48's	18
Mud service Single Truck Chains 24's	19
Mud service Dual-Triple Truck Chains 44's	19
Square Straight Link Truck Chains 21/31/41's	20
Diamond Truck Chain-TN/TND	21
Ladder Truck Chain-TPR/TPD	22
Cable Truck Chain-Single/Dul/WideBase 20/30/40's	23



Tractor & Off Road Vehicle Chains

Grader & Equipment Chains 26/29's	24
Double Ring Tractor Chains 07's	24
RoadKing Tractor chain 08's	25
HP (H-Pattern) Tractor Chains	25
Forklift Tire Chain	26
ATV (All-Terrain Vehicle) Tire Chains	26
Snow Hawg/Snow Blowers Tire Chain	26
Snow Blower& Garden Tractor Chains	26

Repair Parts, Tools & Accessories

Continuous Cross Chain & Side Chain	27
Side Chain Fasteners	27
Cross Chain Hooks	27
Quick Hooks	27
Cross Chain Repair Links	27
Side Chain Repair Links	27
Chain Repair Pliers	28
Tire Chain Adjusters	28
Emergency Chains	28
Replacement "L" Handles	28
Tire Size Guide for Passenger Car/4x4	29-31


Rules For Using Tire Chains 防滑鏈使用規則

Minimum Clearances Required for Tire Chains

防滑鏈安裝最小間隙要求

Passenger Car and Light Truck Tires

轎車和輕卡防滑鏈



S.A.E Tire Chain Classifications	Three Envelopes A	Minimum Dimensions C
SAE 防滑鏈分類	輪胎和車間間隙A	輪胎和車體間隙C最小值
SAE Class "S"	1.46"(37mm)	0.59"(15mm)
SAE Class "U"	1.97"(50mm)	0.91"(23mm)
SAE Class "W"	2.5"(63.5mm)	1.50"(38.1mm)

Note: For design purpose "D" is the maximum grown tire section width as established by Tire and Rim Association (TRA). The minimum clearances specified must be maintained around spring clips, spring bolts, fenders, braces, splash pans, fuel lines, brake lines, brake controls, and wherever necessary.

注意: D是指輪胎之最大值, 裝防滑鏈的車連須符合輪胎和車體間的最小間隙要求, 美標有具體要求, 見上表, 中國用戶請參考美標酌情使用。

Tire size must be known in order to select a tire chain of correct fit. For passenger cars, vans, and small pick-up trucks, it is important to check the owner's manual. The restricted wheel well clearance in most of today's down-sized and front drive vehicles may require the use of SAE Class "S" tire chains, as noted in the manuals.

請按輪胎規格選用防滑鏈, 中國用戶請注意, 選用防滑鏈前, 請查閱車輛說明, 確認所選防滑鏈是否適合您的車輛, 一般來說, 輪胎和車體間隙較小或前驅動的小車, 最小間隙要符合"SAE"中: "S"級的要求, 卡車鏈, 限製較小

Prefit Chains Prior to Actual Use! For Your Convenience & Safety:


使用前請先試裝。爲了你的使用安全和方便。請注意:

- 1、Do not deflate tires to install tire chains.
- 2、If a cross chain should fail, stop immediately, repair or remove.
- 3、Remove tire chains when driving on bare road.
- 4、Avoid hitting curbs with tire chains.
- 5、Make certain your tire chains are properly sized for your tires. A proper fit is the key to performance.
- 6、Tire chains are not designed for towing vehicles.
- 7、Be sure to pull off highway to safe place before installing, servicing or removing tire chains.
- 8、Follow directions for installing tire chains. Apply as tightly as possible by hand for maximum chain life.
- 9、Do not exceed 30 miles per hour, Accelerate and decelerate slowly. Avoid spinning or locking wheels.
- 10、Drive approximately 1/4 mile, stop and retighten.

- 1、根據輪胎規格選用適用的防滑鏈
- 2、嚴禁癩胎或放氣裝防滑鏈。
- 3、嚴禁防滑鏈作拖車用具使用。
- 4、不要在干路上使用防滑鏈。
- 5、嚴禁車輛在機動車道上裝卸防滑鏈。請在安全地點裝卸。
- 6、謹防防滑鏈撞擊路沿等障礙物。
- 7、防滑鏈須漲緊使用, 安裝防滑鏈后, 行駛500m后, 請停車檢查是否漲緊。
- 8、裝防滑鏈的車輛車速不得超過50km/小時。
- 9、防滑鏈如有損壞, 須立即更換或修理, 禁止帶病使用。

KNS/KN/WD Exploded View

- 1.This Exploded View is for KNS9mm,KN12mm, WD16mm, also for KL KV KP.
- 2.These different parts can be chosen for different type or according to your request.
- 3.Please pay attention to the default parts.
- 4.Many new designed parts are not shown on this view,or on development.
- 5.If you have any new request on design, please show us pictures or sample, OEM is welcome.

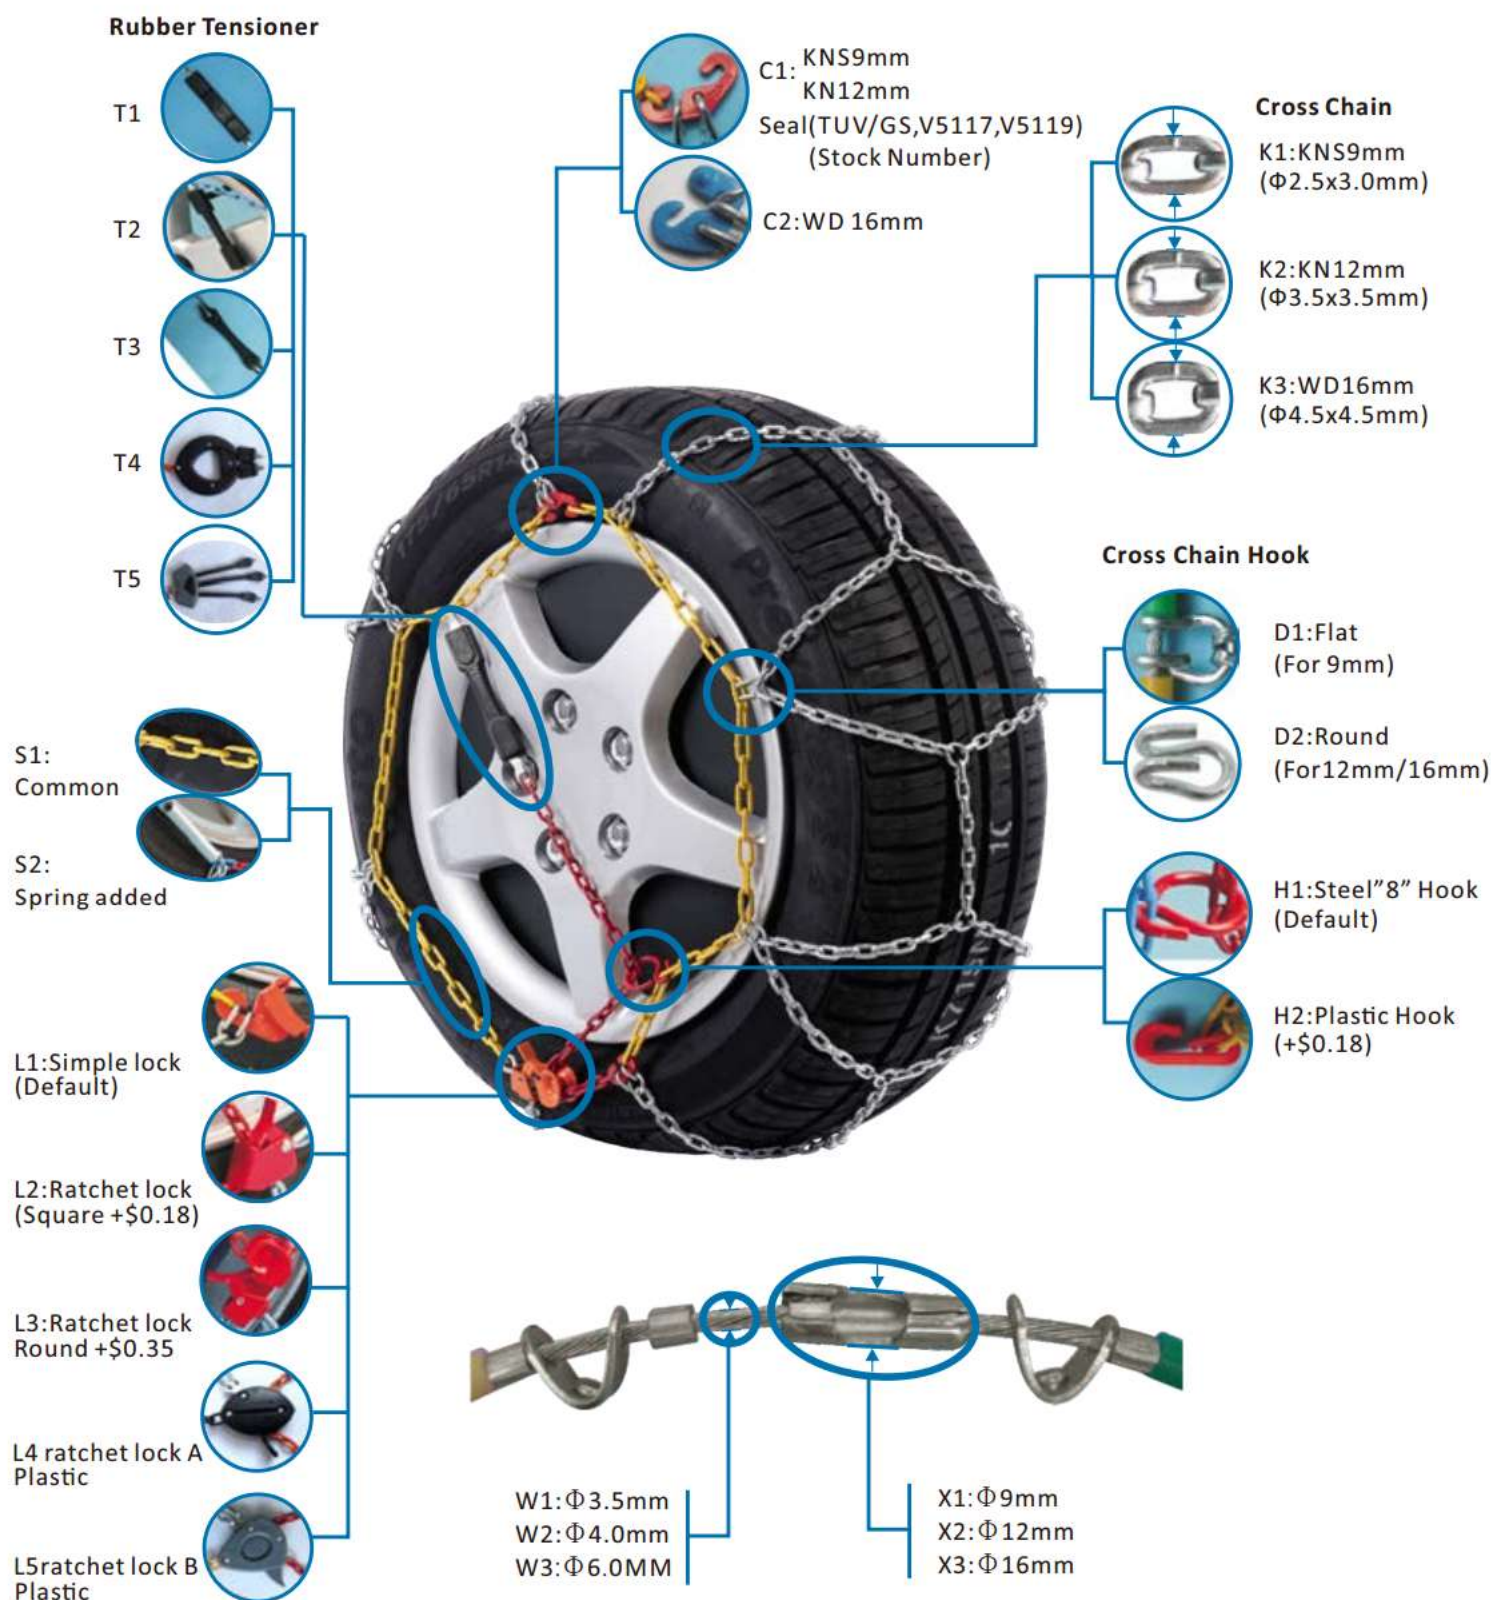

Fit Chart Of Quick Mounting Passenger Tire Chains

速装式防滑鏈適用輪胎規格

Stock No.	Tire Size	
20	12"	135/80R12;135R12;140/80R12;140R12;145/70R12;145/80R12;145R12;155/70R12;165/60R12;165/65R12;550R12
	13"	135/70R13;135/80R13;135R13;145/65R13;145/70R13;155/60R13;155/65R13;165/55R13;175/50R13
	MM	150/65R340;155/65R340;160/60R315;160/65R315
30	12"	150/80R12;150R12;155/80R12;155R12;165/70R12;175/65R12;140/80R13
	13"	145/80R13;145R13;155/70R13;165/60R13;165/65R13;175/60R13;185/55R13;195/45R13
	14"	135/80R14;135R14;145/70R14;155/60R14;155/65R14;165/55R14;165/60R14;175/50R14;195/40R14
	15"	125/80R15;125R15;135/70R15;145/65R15;165/55R15
	MM	150/65R345;160/65R340;170/55R340;180/55R315;180/60R315
40	12"	175/70R12
	13"	150/80R13;150R13;155/80R13;155R13;165/70R13;175/65R13;185/60R13;195/50R13;195/55R13
	14"	145/80R14;145R14;155/70R14;165/65R14;175/60R14;185/50R14;195/50R14
	15"	135/80R15;135R15;145/70R15;155/60R15;155/65R15;165/55R15;175/50R15
	MM	160/65R365;170/55R365;170/65R340;180/60R340;180/65R315;190/55R340
50	13"	160/80R13;160R13;165/80R13;165R13;175/70R13;185/65R13;195/60R13;205/50R13
	14"	155/80R14;155R14;165/70R14;175/65R14;185/55R14;185/60R14;195/55R14;215/40R14
	15"	145/80R15;145R15;155/70R15;165/60R15;165/65R15;175/55R15;185/50R15;195/45R15
	16"	195/40R16
	MM	170/65R365;180/65R340;190/55R365;195/55R340
60	13"	170/80R13;170R13;175/75R13;175/80R13;175R13;185/70R13;195/65R13;200/60R13;205/60R13
	14"	165/80R14;165R14;165/75R14;175/70R14;185/65R14;195/60R14
	15"	155/80R15;155R15;165/70R15;175/60R15;175/65R15;185/55R15;195/50R15;205/45R15
	16"	175/55R16;185/50R16;195/45R16;205/40R16
	MM	180/65R365;190/60R365;190/65R340
70	13"	185/75R13;195/70R13;205/65R13;215/60R13
	14"	175/75R14;185/70R14;195/65R14;205/55R14;205/60R14;215/55R14
	15"	165/80R15;165R15;175/70R15;185/60R15;185/65R15;195/55R15;205/50R15;215/45R15
	16"	175/60R16;185/55R16;195/50R16;205/45R16;215/40R16
	17"	205/40R17
	MM	180/65R390;190/65R365;195/60R365;200/55R390;200/60R365;200/65R340;210/55R365;220/50R365
80	13"	185/80R13;185R13;205/70R13
	14"	175/80R14;175R14;185/75R14;185/80R14;185R14;195/70R14;195/75R14;205/65R14;215/60R14;225/55R14;195/80R14
	15"	175/80R15;175R15;185/70R15;195/60R15;195/65R15;200/60R15;205/55R15;205/60R15;215/50R15;215/55R15;225/50R15
	16"	185/65R16;195/55R16;195/60R16;205/50R16;215/45R16;215/50R16;225/40R16;225/45R16
	17"	185/60R17;205/45R17;205/50R17;215/40R17;215/45R17;225/40R17
	MM	190/65R390;200/60R390;210/55R390;210/65R365;220/55R365
90	14"	195R14;205/70R14;215/65R14;225/60R14
	15"	180/80R15;180R15;185/75R15;185/80R15;185R15;195/70R15;195/75R15;205/65R15;215/60R15;225/55R15;255/45R15
	16"	175/75R16;175/80R16;195/65R16;205/55R16;205/60R16;215/55R16;225/50R16
	17"	225/45R17;235/40R17
	18"	215/40R18;225/40R18
	MM	210/65R365;220/55R390;225/55R390
100	14"	205/75R14;205/80R14;205R14;215/70R14;215/75R14;235/60R14;245/60R14
	15"	195/80R15;195R15;205/70R15;205/75R15;215/65R15;215/70R15;225/60R15;230/60R15;235/55R15;235/60R15
	16"	205/65R16;215/60R16;225/55R16;235/50R16;245/45R16
	17"	205/55R17;215/50R17;215/55R17;225/50R17;235/45R17;245/40R17
	18"	215/45R18;225/45R18;235/40R18;255/35R18
	19"	225/40R19;235/35R19
	MM	225/40R475;230/55R390;240/45R415;240/55R390
110	14"	225/70R14
	15"	225/65R15;235/60R15
	16"	215/65R16;225/60R16;235/55R16;245/50R16
	17"	215/60R17;235/50R17;245/45R17;255/40R17
	18"	235/45R18;245/40R18
	19"	235/40R19;245/35R19
	MM	220/65R390;235/40R475
120	14"	215/80R14;215R14
	15"	205/80R15;215/75R15;225/70R15
	16"	255/50R16
	17"	225/55R17;255/45R17;265/40R17
	18"	240/45R18;245/45R18;255/40R18;265/35R18
130	15"	235/70R15;245/60R15
	16"	215/70R16;225/65R16;235/60R16;245/55R16;245/60R16
	17"	225/60R17;225/65R17;235/55R17;235/60R17;245/50R17;275/40R17
	18"	235/50R18;235/55R18;245/50R18
	19"	235/45R19;245/40R19

If your tire size is not shown on this table, Please email us, we can design and produce for you according to your tire size



Quick Mounting Passenger Tire Chains

Auto Model: passenger car S.A.E Class: "S" Material: carbon steel or alloy steel TÜV/GS & ONORM V5117 certification
Packing: 1pair/plastic box or handbag with label and manual 3pairs/carton Accessories: 4 pcs of repairing links and 1 pair glove

Case hardened and zinc-plated



KNT 7mm

Type: Diamond Twisted link
Wire size of Cross chain: 3.0mm

Stock No.	Stock No.
KNT20	KNT80
KNT30	KNT90
KNT40	KNT100
KNT50	KNT110
KNT60	KNT120
KNT70	KNT130

Check the quick mounting tire size table



KNS 9mm

Type: Diamond Square link
Wire size of Cross chain: 3.0x2.5mm

Stock No.	Stock No.
KNS20	KNS80
KNS30	KNS90
KNS40	KNS100
KNS50	KNS110
KNS60	KNS120
KNS70	KNS130

Check the quick mounting tire size table



KN3.5 12mm

Type: Diamond Square link
Wire size of Cross chain: 3.5x3.5mm

Stock No.	Stock No.
KN20	KN80
KN30	KN90
KN40	KN100
KN50	KN110
KN60	KN120
KN70	KN130

Check the quick mounting tire size table



KN3.8 12mm

Type: Diamond Square link
Wire size of Cross chain: 3.8x3.8mm

Stock No.	Stock No.
KN20	KN80
KN30	KN90
KN40	KN100
KN50	KN110
KN60	KN120
KN70	KN130

Check the quick mounting tire size table



KL 12mm

Type: Ladder Square link
Wire size of Cross chain: 3.5x3.5mm

Stock No.	Stock No.
KL20	KL80
KL30	KL90
KL40	KL100
KL50	KL110
KL60	KL120
KL70	KL130

Check the quick mounting tire size table



KP 12mm

Type: Diamond Link over Link
Wire size of Cross chain: 3.5x3.5mm

Stock No.	Stock No.
KP20	KP80
KP30	KP90
KP40	KP100
KP50	KP110
KP60	KP120
KP70	KP130

Check the quick mounting tire size table



Plastic Box



Oxford Handbag



EVA Handbag



Quick Mounting 4x4/SUV/WD/Pick Up/Light Truck Tire Chains

Auto Model: Jeep/SUV/4x4WD/PICK-UP S.A.E Class: "U" Material: carbon steel or alloy steel Case hardened and zinc-plated
TUV/GS & ONORM V5117 certification Packing: 1pair/handbag or plastic box with label and manual 3pairs/carton Accessories: 4 pcs of repairing links and 1 pair glove



WDT11mm



WDS12mm



WD16mm

Stock No.	Tire Size	
WD360	14"	185/75R14;185-14;195/70-14;205/65-14;215/60-14
	15"	175/80R15;185/70-15;195/65-15
	16"	205/55R16;215/50-16
WD370	14"	195/75-14;195-14;205/70-14;215/65-14
	15"	185/75-15;185-15;195/70-15;205/65-15;215/60-15
	16"	175/75-16;175-16;185/70-16;195/65-16
WD380	14"	205/75-14;205-14;215/70-14;235/60-14
	15"	195/75-15;195-15;205/70-15;205/75-15;215/65-15;225/60-15
	16"	185/75-16;205/65-16;215/60-16
	17"17.5"	215/55-17
WD390	14"	215/75-14;215-14;245/60-14
	15"	205/80-15;215/70-15;225/70-15
	16"	185-16;195/75-16;195-16;205/70-16;215/65-16;215/70-16
	17"17.5"	215/60-17;225/55-17;205/65-17.5
WD400	15"	215/75-15;215-15;225/75-15;235/70-15;255/60-15
	16"	205/75-16;205/80-16;205-16;225/65-16;235/60-16
	17"17.5"	235/55-17
	18"	225/55-18;235/50-18
WD410	15"	235/75-15
	16"	215/75-16;215-16;225/70-16;225/75-16;235/70-16
	17"17.5"	215/75-17;225/65-17;225/70-17;235/65-17;205/75-17.5
	18"	235/55-18;235/60-18
WD450	15"	255/70-15;265/65-15;275/60-15
	16"	215/85-16;245/70-16;255/65-16
	17"17.5"	245/65-17;255/60-17;265/55-17;295/45-17;215/75-17.5
	18"	255/55-18
WD460	15"	215/65-19;255/50-19
	16"	255/75-15;265/70-15
	17"17.5"	235/80-16;245/75-16;255/70-16
	19"19.5"	265/60-17;275/55-17;225/75-17.5
WD470	15"	225/65-19;255/55-19;265/50-19;285/45-19
	16"	285/70-15
	17"17.5"	265/75-16;275/70-16
	18"	265/70-17
WD480	15"	265/75-15
	16"	235/85-16;255/75-16;265/70-16
	17"17.5"	265/65-17;235/75-17.5
	18"	265/60-18
	19"19.5"	245/65-19
WD490	20"	255/55-20
	15"	825-15
	16"	825-16
	17"17.5"	9.5-17.5;255/75-17.5
	18"	285/60-18;700-18;750-18
WD490	19"19.5"	8-19.5
	20"	650-20;700-20

WDT

Type: Diamond Twisted Round Link
Wire size of Cross chain: 4.5mm

Stock No.	Stock No.
WDT360	WDT450
WDT370	WDT460
WDT380	WDT470
WDT390	WDT480
WDT400	WDT490
WDT410	

WDS

Type: Diamond Square link
Wire size of Cross chain: 3.5x3.5mm

Stock No.	Stock No.
WDS360	WDS450
WDS370	WDS460
WDS380	WDS470
WDS390	WDS480
WDS400	WDS490
WDS410	

WD

Type: Diamond Square link
Wire size of Cross chain: 4.5x4.5mm

Stock No.	Stock No.
WD360	WD450
WD370	WD460
WD380	WD470
WD390	WD480
WD400	WD490
WD410	



If your tire size is not shown on this table, Please email us, we can design and produce for you according to your tire size

MONTAGEANLEITUNG – INSTRUCTIONS DE MONTAGE – ASSEMBLY INSTRUCTIONS ISTRUZIONI DI MONTAGGIO – UPUT ZA MONTAŽU – NAVOD ZA MONTAŽO

Die Kette in der Nähe des Reifens, wie auf dem Foto dargestellt, auslegen. Dabei ist darauf zu achten, daß die Kette nicht verwickelt ist. Placer la chaîne près du pneu comme sur la photo, en s'assurant qu'elle ne soit pas emmêlée. Position the chain near the tyre as in the Photograph making sure that it is not entangled. Posizionare la catena vicino al pneumatico come da fotografia facendo attenzione che non sia aggrovigliata. Lanac raširiti ravno po podu, tako da su krajevi žutog zatezača usmerena na levu stranu. Verige lepo razprostrite po tleh in preverite, ali je rumeno obarvani konec nosilnega kabla obrnjen proti levi.	Das Kabel, beginnend mit dem gelben Ende, von der linken Radseite aus einführen und hinter das Rad bringen. Faire tourner le câble derrière la roue (en commençant par l'extrémité jaune) en l'introduisant par le côté gauche de cette dernière. Turn the cable (starting from the yellow edge) to the back of the wheel introducing it from the left hand side of the chain. Far ruotare il cavo (iniziando dall'estremità di colore giallo) dietro alla ruota inserendolo dalla parte sinistra della stessa. Krajeve žutog zatezača sa leva na desno provuci iza točka. Nosilni kabel speljite za kolesom in sicer tako, da rumeno obarvani konec potisnete v smeri od leve proti desni.	Das Kabel an beiden Enden festhalten, bis zum oberen Rand des Reifens anheben und einhaken (1). Soulever le câble jusqu'au bord supérieur du pneu en le prenant par les deux extrémités et l'accrocher (1). Raise the cable to the upper edge of the tyre holding it at the two extremities and fix it (1). Sollevare il cavo fino al bordo superiore del pneumatico afferrandolo per le due estremità ed agganciarlo (1). Zatezač malo izdignuti i onda ta dva kraja zakačiti. Nosilni kabel dvignite toliko, da boste lahko speli skupaj oba skrajna konca.	Die äußeren oberen Kettenenden einhaken (2). Accrocher les extrémités externes supérieures de la chaîne (2). Attach the external upper edges of the chain (2). Agganciare le estremità esterne superiori della catena (2). Zelenu krajnju kuku zakačiti za kraj žutog lanca. Zunanji zeleni priključek pripnite na skrajni konec rumene verige.
Das Kabel und den Verschluss auf der Innenseite des Rads zurechtschieben und genau ausrichten. Pousser et ajuster parfaitement le câble et la fermeture à l'intérieur de la roue. Push and adjust precisely the cavity and the closure on the inside of the wheel. Spingere ed assestare perfettamente il cavo e la chiusura all'interno della ruota. Zatezač gurnuti do unutrašnjeg dela točka, i paziti da ne dodiruje delove vesanja. Nosilni kabel potisnite na notranjo stran kolesa in preverite, da nikjer ne teče po tekalni površini pnevmatike.	Das rot Schliessketten in der Klemme einsetzen (3) und ziehen. Passer la chaînette de fermeture de couleur rouge dans le dispositif de blocage (3) et tirer. Slip the red coloured locking chain into the locking device (3) and pull it. Far passare il catenino di chiusura di colore rosso nel dispositivo di bloccaggio (3) e tirarlo. Crveni lanac provuci kroz crveni zatezač koji se sam zablokira. Rdeče obarvano verigo speljite skozi rdeče obarvani samozaporni natezalnik.	Das Ketchen im Vorgelege Haken einsetzen (4) und nachdem es gezogen zu haben soll man es am Kette (5) einhaken. Passer la chaînette dans le crochet de renvoi (4) et après l'avoir tiré, l'accrocher à la chaîne (5). Slip the chain into the deferment hook (4) and after having it pulled, hook it on the chain (5). Far passare il catenino nel gancio di rinvio (4) e, dopo averlo tirato, agganciarlo alla catena (5). Gumeni potezač uvuci u crveni prsten. Zatezač koliko je moguće snažno povuci, i gumeni potezač zakačiti za petlju koja se nalazi sa strane. Na notranjo stran rdečega obroča vstavite gumijasto napenjalno, nato pa kar se da povlecite napenjalno verigo ter pritrdite gumijasto napenjalno na enega od stranskih obročev verige.	ACHTUNG! Jede Schneekette passt auf mehrere Reife an und deswegen ist es schwierig sofort eine einwandfreie Anpassung zu bekommen. Wir empfehlen also, wann notwendig, nach einer kurzen Strecke oder mindesten 1/4 Runde das rot Ketchen wieder zu spannen. ATTENTION! Chaque chaîne s'adapte à plusieurs pneus et il sera par conséquent très difficile avoir tout de suite une adaptation parfaite. Pourtant il est conseillé, si nécessaire après un petit trajet ou au moins 1/4 tour, de resserrer le nouveau la chaînette rouge. ATTENTION! Each chain will be suitable for more than one type of tyre, so it will be very difficult to have immediately a perfect fitting. That's why we advise, if necessary after a short track or at least 1/4 turn to tighten again the red chain. ATTENZIONE! Ogni catena si adatta a più pneumatici e quindi difficile avere subito un adattamento perfetto. Si consiglia pertanto, se necessario, dopo un breve tragitto o almeno 1/4 di giro, di ritendere il catenino rosso.

ANLEITUNG ZUM ABMONTIEREN – INSTRUCTIONS DE DEMONTAGE – REMOVAL INSTRUCTIONS ISTRUZIONI DI SMONTAGGIO – UPUT ZA DEMONTAŽU – NAVOD ZA DEMONTAŽO

Fahrzeug, wie auf dem Foto gezeigt, anhalten. Arrêter la voiture comme sur la photo. Stop the vehicle as in the photograph. Fermare la vettura come da fotografia. Vozilo zaustaviti tako da je zelena spoljna zakačka usmerena na dole, odnosno na gore (kod vozila sa prednjim pogonom). Vozilo zaustavite tako, da bo zunanji zeleno obarvani priključek na gornji strani kolesa (pri vozilih s pogonom na prednja kolesa pa na prednji strani glede na smer vožnje).	Das Ketchen losmachen und aus die Klemmen ziehen. Die Schake welche eventuell gequetscht sind vom Reifen herausziehen. Décrocher la chaînette et l'enlever du dispositif de blocage. Enlever les maillons éventuellement écrasés par le pneu. Unhook the chain and take it off from the locking device. Release the chain links which are eventually crushed by the tyre. Sganciare il catenino e sfilarlo dal dispositivo di bloccaggio. Liberare gli anelli di catena eventualmente schiacciati dal pneumatico. Gumeni potezač otkaćiti i lanac za zatezanje kao prvo izvuci iz prstena i onda izvuci iz zatezača. Snemite gumijasto napenjalno in izvlecite napenjalno verigo najprej skozi obroč in nato iz rdeče obarvanega samozapornega natezalnika.	Kabel nach außen ziehen und öffnen (1). Äußerer rot Haken lösen (2). Tirer la câble vers l'extérieur et l'ouvrir (1). Ouvrir le crochet rouge externe (2). Pull the cable towards the exterior and open it (1). Release the red external hook (2). Tirare il cavo verso l'esterno ed aprirlo (1). Aprire il gancio rosso esterno (2). Gumeni potezač otkaćiti i lanac za zatezanje kao prvo izvuci iz prstena i onda izvuci iz zatezača. Izvlcite nosilni kabel; veriga se bo sesedla na tla.	Nachdem die Kette auf den Boden gefallen ist, Fahrzeug bewegen. Après avoir laissé tomber la chaîne par terre, déplacer la voiture. After having allowed the chain to fall to the ground, move the vehicle. Dopo aver lasciato cadere la catena per terra spostare la vettura. Otkaćiti krajeve zatezača i lanac položiti na pod. Vozilo pomeriti sa lanaca. (Kod vozila sa prednjim pogonom, demontaža unutrašnjeg zatezača se olakšava zakretanjem točka). Nato vozilo premaknite toliko, da boste izpod pnevmatik lahko odstranili verige. Pri vozilih s pogonom na prednja kolesa je priporočljivo kolesa obrniti v levo ali desno; tako bo notranji nosilni kabel lažje sneti.

GER WICHTIGE HINWEISE – Die Kette vor der Fahrt probeweise montieren. – Schneeketten sind nur im Notfall anzulegen, um Antriebsprobleme zu lösen und sichere Straßenlage bei Schnee und Eis zu gewährleisten. – Bei der Fahrt mit Schneeketten ist zu beachten, daß das Fahrzeug hierdurch auf unterschiedliche Weise reagiert. Daher sollte weder abrupt gebremst noch beschleunigt werden. – Die Höchstgeschwindigkeit mit Schneeketten beträgt 50 km/h. – Kettenteile mit Kontakt zum Asphalt unterliegen Abnutzung. Ketten, deren Abnutzungsgrad über 50% liegt, sollten nicht mehr eingesetzt werden. Ggf. die abgenutzte Seite zum Reifen hin montieren. – Falls die Kette reißt, ist diese umgänglich zu demontieren, um Schäden am Fahrzeug zu vermeiden. – Die Ketten nach dem Einsatz mit lauwarmem Wasser reinigen und trocknen lassen. Erst anschließend erneut in ihrem Koffer verpacken.	FRA CONSEILS IMPORTANTS – Avant de se mettre en voyage, il est conseillé d'essayer de monter les chaînes chez soi. – Les chaînes à neige doivent être utilisées en tant que moyen d'urgence permettant de résoudre les problèmes de traction et de tenue de route sur les chaussées verglacées ou enneigées. – Lorsque l'on roule avec des chaînes, ne pas oublier que la voiture réagit différemment aux commandes. Il est donc nécessaire d'éviter les freinages ou les accélérations brusques. – Lorsque la voiture est équipée de chaînes, ne jamais rouler à plus de 50 km/h. – Les parties de la chaîne qui se trouvent en contact avec l'asphalte sont soumises à usure. Il est nécessaire d'éviter d'utiliser des chaînes présentant un taux d'usure supérieur à 50%. En cas d'usure, monter les chaînes en appliquant le côté le plus usé contre le pneu. – En cas de rupture est équipée de chaînes, ne jamais rouler à plus de 50 km/h. – Les parties de la chaîne qui se trouvent en contact avec l'asphalte sont soumises à usure. Il est nécessaire d'éviter d'utiliser des chaînes présentant un taux d'usure supérieur à 50%. En cas d'usure, monter les chaînes en appliquant le côté le plus usé contre le pneu. – Après utilisation, il est recommandé de laver les chaînes à l'eau claire et de les laisser sécher avant de les ranger dans la mallette.	ENG IMPORTANT ADVICE – Before embarking on a journey during which chains may be needed, put on and remove the snow chains to ensure you are familiar with the procedure. – The snow chains must be used only as an emergency measure to solve traction and road holding problems on ice and snow. – When driving with snow chains on, remember that the vehicle will respond differently to controls: do not brake and/or accelerate suddenly. – Never exceed a speed of 50 km/h with the chains on. – Those parts of the chain in contact with the road surface are subjected to wear: do not use chains that are more than 50% worn. If worn, put the chains on so that the worn surface is against the tyre. – If the chain breaks, take it off immediately to avoid damage to the vehicle. – After use, wash the chains in warm water and allow them to dry before putting them back into the carrying case.
ITA CONSIGLI IMPORTANTI – Prima di iniziare il viaggio, si consiglia di provare a montare le catene a casa. – La catena da neve deve essere utilizzata come mezzo di emergenza per risolvere i problemi di trazione e tenuta di strada su ghiaccio e neve. – Quando si viaggia con catene montate bisogna ricordarsi che la vettura reagisce in modo diverso ai vari comandi, pertanto non eseguire brusche frenate e/o accelerazioni. – Con catene montate non superare mai la velocità di 50Km/h. – Le parti della catena a contatto con l'asfalto sono soggette ad usura pertanto evitare di utilizzare catene con uno stato di usura superiore al 50%. In presenza di usura, montare le catene con il lato più usurato rivolto verso il pneumatico. – In presenza di una rottura della catena, la si deve smontare subito onde evitare danni all'autovettura. – Dopo l'utilizzo, prima di riporre nella valigetta si raccomanda di lavarle con acqua tiepida e di lasciarle asciugare.	SRB/BIH/HR KORISNI SAVETI – Pre vožnje lance probno montirajte. – Lance za sneg upotrebiti samo u hitnim slučajevima kada se na putevima nalazi sneg ili led. – Kod vožnje sa lancima za sneg treba voditi računa da se vozilo prilikom vožnje drugačije ponaša na putu nego inače. Zato se ne sme naglo kočiti niti naglo dodavati gas. Preporučuje se, da ne vozite brže od 50 km/h dok imate montirane lance. – Delovi lanaca koji dolaze u kontakt sa asfaltom se troše. Lanci koji su istrošeni preko 50% ne bi se trebali više upotrebljavati. – Ako lanci puknu, onda ih demontirajte, da ne bi došlo do oštećenja vozila. – Lance nakon upotrebe isperite sa toplom vodom i prosušite ih. Tek onda ih spakujte nazad u njihov kofer.	SLO KORISTNI NASVETI – Svetujemo vam, da verige najprej poizkusite namestiti na vozilo doma, torej še predno se odpravite na vožnjo. – Snežne verige so pripomoček, ki se uporablja v sili, kadar je oprijem pnevmatik na zasneženem ali poledenem cestišču preslab. – Pri vožnji z nameščenimi snežnimi verigami ne pozabite, da se vozilo obnaša drugače kot v normalnih voznih razmerah. Zato se izogibajte sunkovitemu zaviranju in/ali močnemu pospeševanju. – Kadar so na kolesih nameščene snežne verige, hitrost vožnje ne sme nikdar preseči 50 km/h. – Deli verige, torej členi, ki so v stiku z asfaltno površino cestišča, se izrabljajo. Zato ne uporabljajte verig, ki so izrabljene več kot 50 odstotno. Kadar pa uporabljate snežne verige, ki so delno že izrabljene, jih na kolesa namestite tako, da bo izrabljena površina verig obrnjena proti pnevmatikam. – Če se veriga pretrga, jo takoj snemite s kolesa, da ne pride do poškodbe vozila. – Predno snežne verige po uporabi pospravite v kovček, priporočamo, da jih operete v topli vodi in pustite, da se osušijo.

NOTFALL AUSBESSERUNG REPARATION DEMERGENCE - EMERGENCY REPAIR
RIPARAZIONE D'EMERGENZA - POPRAVAK U SLUČAJU NUŽDE - NUJNA POPRAVILA

Ausbesserung Glieder für die Ketten mit "D" Schnitt (ausgerüstet) Chaînon de réparation pour la chaîne avec section à "D" (en équipement) Repairing stitches for chain with "D" section (in equipment)	Maglie di riparazione per la catena con sezione a "D" (in dotazione) Popravak "D" veze (u kompletu). Popravilo členkov tekalnega dela »D« oblika (v opremi)	Ausbesserung Glieder für Seitenkette (ausgerüstet) Chaînon de réparation pour la chaîne latérale (en équipement) Repairing stitches for side chain (in equipment)	Maglie di riparazione per la catena laterale (in dotazione) Popravak veze sa strana (u kompletu) Popravilo členkov za stranska vodila verige (v opremi)



TPU Snow Chain

- TPU bears low temperature and endures abrasion
- Touches the ground covered with high rigidity alloy nail, skid-resistant, 360-degree omni-directional
- Does not damage the ground
- more long life than steel snow chains, if you use it in proper way.
- No shaking when the vehicle is running

1. Pay attention to the outside and inside..
2. Drive your car on the 1/3 center of the TPU snow chains.
3. Put the TPU chains on the wheel and hook point 1 and point 2 inside of the wheel. Tip: you can adjust the front wheel left or right and let the inside
4. Put the double hook through the hole pay attention to the direction. hook show...
5. Put the rubber ring (with hole) on the hooks using the tool.
6. Put the rubber ring (without hole) on the hooks and tighten it.

KR20	12" & 13"	135R12;145/70X12;145/70R13;140R12;135R12;155/65R13;145R12;135/70R13;165/55R13;155R12;145/65R13;175/50R13
KR30	12" & 13"	150R12;155/70R12;165/70R12;145R13;155/70R13;175/60R13;140R13;165/60R13;185/55R13;165/65R13;195/45R13
	14" & 15"	135R14;195/40R14;155/65R14;125R15;165/60R14;135/70R15;175/50R14;145/65R15
KR40	12" & 13"	175/70R12;185/60R13;155R13;195/55R13;165/70R13;175/65R13
	14" & 15"	145R14;175/60R14;135R15;155/70R14;185/50R14;155/65R15;165/65R14;195/50R14
KR50	12" & 13"	165R13;175/70R13;185/65R13;195/60R13
	14" & 15"	155R14;195/50R14;165/60R15;165/70R14;195/55R14;165/65R15;175/65R14;215/40R14;175/55R15;185/55R14;145R15;185/50R15;185/60R14;155/70R15;195/45R15
	16" & Other	195/40R16
KR60	12" & 13"	170R13;205/60R13;175R13;185/70R13;195/65R13
	14" & 15"	165R14;195/60R14;165/70R15;165/75R14;185/55R15;175/60R15;175/70R14;195/50R15;175/65R15;185/65R14;155R15
	16" & Other	185/50R16;195/45R16
KR70	12" & 13"	195/70R13;205/65R13
	14" & 15"	175/75R14;205/60R14;195/55R15;185/70R14;175/70R15;205/50R15;195/65R14;185/60R15;205/55R14;185/65R15
	16" & Other	195/50R16;205/45R16;215/40R16
KR80	12" & 13"	185R13;205/70R13
	14" & 15"	175R14;215/60R14;195/65R15;185R14;225/55R14;200/60R15;185/75R14;165R14;205/55R15;195/70R14;175R15;215/50R15;195/75R14;185/70R15;225/50R15;205/65R14;195/60R15
	16" & Other	195/55R16;225/40R16;205/50R17;195/60R16;225/45R16;215/40R17;205/50R16;185/60R17;215/45R17;215/50R16;205/45R17;225/40R17
KR90	14" & 15"	195R14;185R15;205/65R15;205/70R14;195/70R15;215/60R15;225/60R14;195/75R15;225/55R15;180R15;205/60R15
	16" & Other	175R16;205/60R16;235/40R17;175/75R16;215/55R16;215/40R18;195/65R16;225/50R16;225/40R18;205/55R16;225/45R17
KR100	14" & 15"	205R14;205/70R15;225/65R15;215/70R14;215/65R15;230/60R15;235/60R14;215/70R15;235/55R15;195R15;225/60R15;235/60R15
	16" & Other	205/65R16;245/45R16;245/40R17;215/60R16;215/50R17;225/45R18;215/65R16;215/55R17;235/40R18;225/55R16;225/50R17;235/40R19;235/50R16;235/45R17
KR110	16" & Other	225/60R16;255/40R17;235/50R17;245/40R18;245/45R17
KR120	16" & Other	215/70R16;255/45R17;235/60R16;245/45R18;225/55R17;255/40R18;225/60R17
KR130	16" & 17"	235/75R16;245/70R16;255/65R16;215/85R17;235/70R17
KR140	15" & 16"	265/70-15;245/75-16;265/65-16
KR150	16" & Other	265/70R16;275/70R16;265/65R17;31X10.5



If your tire size is not shown on this table, Please email us, we can design and produce for you according to your tire size

Type PL Passenger Car Chain

Meet S.A.E. class "S" clearance.

Economical design and easy to install.

Rubber Adjusters recommended. Sold separately. CAM is added on side chain.

Work equally well on front- and rear-wheel drive vehicles.

PLC1900 type-twisted link -----cross chains is twisted chain; side chain is cable chains

PL1100 type-twisted link-----cross chain is twisted link, ladder type; side chain is straight link

PLS1100 type-square link-----cross chain is square link,ladder type; side chain is straight link

PLV1100 type-twisted link with icebreaker (V-Bar)-----cross chain is twisted link with V-Bar; side chain is straight link



PLC1900



PL1100



PLV1100



PLS1100

Tire Sizes						Stock No.	Weight per Pair	Replacement Cross Chain	Cross Chain per 1/2 Pair	
12" & 13 Rims		14" Rims		15" & other Rims						
145R12 P145/80R12	135R13 P155/55R13					1910 1110 S1110 V1110	3.10 3.65 4.35	5414	9	
P165/70R12										
155R12 P175/70R12 145R13 P145/80R13 155R13 P155/70R13	P155/80R13 160R13 P165/65R13 P165/70R13 175/50R13 175/60R13	P145/70R14 165/65R14		135R15 P145/70R15		1914 1114 S1114 V1114	3.15 3.72 4.45	5414	10	
165R13 P165/80R13 P175/70R13	P185/60R13 P185/70R13 P175/75R13	165/70R14 P165/75R14 P175/60R14	P185/55R14 P175/65R14	135R15 145R15 P145/70R15 P145/80R15	P155/70R15 P165/70R360 P165/70R365	1918 1118 S1118 V1118	3.05 3.99 4.80	5414	11	
175R13 P175/80R13 P185/80R13		165R14 175R14 P175/75R14 P175/80R14		155R15 P155/80R15 165R15 165/80R15	P175/70R15	1922 1122 S1122 V1122	3.30 4.35 5.22	5419	12	
185R13 P195/60R13 P195/70R13 P205/60R13	P205/70R13 P215/50R13 P215/60R13	P175/70R14 P185/60R14 185/65R14 P185/70R14	P195/55R14 P195/60R14 P195/65R14 205/55R14	P185/55R15 P185/60R15 P195/50R15	205/50R15 P185/65R365 P180/65R390	1926 1126 S1126 V1126	3.25 4.22 5.15	5419	11	
P185/85R13 195R13 P195/75R13 P215/65R13		P185/75R14 P185/80R14 P195/70R14 P195/75R14 P205/60R14	P205/70R14 P215/60R14 P215/65R14 P225/60R14	175R15 P185/65R15 P185/70R15 P195/55R15 P195/60R15 195/65R15	P195/70R15 P205/60R15 P215/50R15	P225/65R15 195/50R16 205/50R16 P190/65R390	1930 1130 S1130 V1130	3.55 4.58 5.58	5419	12
P235/50R13 P245/50R13		195R14 205R14 P205/75R14 P215/70R14 P215/75R14	P225/65R14 P235/60R14 P245/50R14	185R15 P195/75R15 P205/55R15 P205/65R15 P205/70R15 P215/55R15 P215/60R15 P215/65R15	P225/50R15 P225/55R15 P195/55R16 P205R16 P205/55R16 P205/60R16 P205/65R16	P215/50R16 P215/55R16 P235/50R16 P235/55R16 P205/50R17 P220/55R390	1934 1134 S1134 V1134	3.79 4.85 5.94	5420	12
		215R14 225R14 P225/70R14 P225/75R14 P235/70R14 P245/60R14	P255/55R14 P255/60R14 P265/50R14	205R15 P205/75R15 P215/70R15 P215/75R15 P225/60R15 P225/70R15 P235/60R15 P235/65R15 P245/50R15	P215/60R16 P215/65R16 P215/70R16 P225/55R16 P225/60R16 225/65R16 P215/50R17 P215/55R17	215/60R17 P225/50R17 P225/55R17 P235/55R17 P225/45R18 225/50R18 P220/65R390	1938 1138 S1138 V1138	4.10 5.35 6.53	5420	13
		P245/70R14 P265/60R14 P275/60R14		235R15 P235/70R15 P245/60R15 P255/55R15 P255/60R15 P255/65R15 P265/50R15	P265/60R15 P275/50R15 215/75R16 P235/65R16 P245/50R16 P245/55R16 P255/50R16	P215/65R17 225/60R17 225/65R17 P245/50R17 P255/45R17 P245/45R18 245/50R18	1942 1142 S1142 V1142	4.38 5.53 6.85	5422	13

If your tire size is not shown on this table, Please email us, we can design and produce for you according to your tire size

Type R & Type RP Snow Chain

Type P(Regular) and type RP (Reinforced).
Meet S.A.E. class "U" or "W" clearance.
Cross chain normal wire size is 5.26mm
Economical design and easy to install.

Twist link ladder design.
For use on front -wheel drive vehicles.
Rubber Adjusters recommended. Sold separately.
Bright zinc polish. Packed in 1 pair per bag or box



TYPE P1200 REGULAR



TYPE RP1800 V-BAR REINFORCED

Tire Sizes			Stock No.	Weight per Pair	Replacement Cross Chain	Cross Chain per 1/2 Pair
12" & 13 Rims	14" Rims	15" & other Rims				
6.00R12 165/70R12 145R12 155R12 175/70R12 155/80R12 145R13 165/65R13 145/80R12 135R13 175/60R13 165/70R13 155R13 165/60R13 155/70R13	135R14 165/65R14	135R15	1206 1806	4.95 6.10	5214 5814	10
165R13 215/50R13 185/60R13 175R13 175/70R13 145/65R13	6.00R14 175R14	5.60R15 175/70R15 165R15	1210 1810	5.90 6.80	5214 5814	12
185R13 155/80R13 165/75R13	155R14 195/55R14 175/60R14 165R14 165/70R14 165/75R14 165/80R14 175/70R14 175/65R14	155R15 185/55R15 145R15 165/65R15	1217 1817	5.50 6.50	5214 5814	11
7.00R13 7.25R13 185/75R13 185/80R13 185R13 195/75R13 195R13 205/65R13 205/70R13 215/60R13 215/65R13	7.35R14 175/70R14 175/75R14 175/80R14 175R14 185/65R14 185/70R14 185/75R14 185/80R14 185R14 195/60R14 195/65R14 205/55R14 205/60R14 205/65R14 225/55R14	6.40R15 165/80R15 165R15 175/70R15 175/75R15 175R15 185/65R15 185/70R15 195/50R15 195/55R15 195/60R15 205/50R15 205/55R15 205/60R15 155/60R16 155/80R16 205/50R16 185/70R365 180/65R390 185/65R390 200/60R390	1230 1830	6.70 7.70	5220 5820	11
	7.00R14 7.75R14 185/60R14 195/70R14 195/75R14 195R14	6.50R15 6.70R15LT 7.35R15 185/75R15 185R15 195/65R15 195/70R15 195/75R15 195R15 205/65R15 205/70R15 225/50R15 225/55R15 205/55R16 205/60R16 215/55R16 225/45R16 215/45R17 215/50R17 225/45R17 225/40R18 190/65R390 225/55R390	1240 1840	7.30 8.20	5220 5820	12
	215R14 225/75R14 225R14 235/60R14 235/70R14 245/60R14 245/70R14	215/75R15 215R15 225/70R15 225/75R15 225/80R15 225R15 230R15 235/65R15 235/70R15 235/75R15 225/60R16 225/65R16 225/70R16 235/60R16 245/50R16 245/60R16 8.00R16.5LT	1250 1850	8.20 9.10	5222 5800	13
	7.50R14 205R14 215/65R14 215/70R14 215/75R14 225/60R14 225/65R14 225/70R14	195/80R15 205/75R15 205R15 215/60R15 215/65R15 215/70R15 225/60R15 225/65R15 235/60R15 6.00R16LT 205/65R16 215/60R16 215/65R16 225/50R16 225/55R16 235/50R16 245/45R16 235/45R17 245/40R17 245/35R18	1254 1854	7.50 8.65	5222 5800	12

If your tire size is not shown on this table, Please email us, we can design and produce for you according to your tire size

Cable Passenger Car Chain

- Meet S.A.E. class "S" clearance.
- Economical design and easy to install.
- Lightweight and quiet running.
- For use on front-wheel drive vehicles.
- Work equally well on front- and rear-wheel drive vehicles.
- For radial and bias tires.
- Rubber adjuster recommended, sold separately.
- Packed in reusable plastic box or handbag.


1000S

V1000S

Tire Sizes				Stock No.	Weight per Pair LBS	Number of Rollers per Cross Chain	Cross Chain per 1/2 Pair		
12" & 13" Rims		14" Rims						15" & Other Rims	
155R12 P165/70R12 P175/7012 145R13 P145/80R13 155R13	P155/70R13 P155/80R13 160R13 P165/70R13 175/50R13 175/60R13	P145/70R14		135R15		1014 V1014	4 6	19 19	10 10
165R13 P165/65R13 P165/80R13	P175/70R13 P175/75R13 P185/60R13	165/65R14 165/70R14 P165/75R14	P175/60R14 P175/65R14 P185/55R14	145R15 P145/70R15 P145/80R15	P155/70R15 P165/70R360 P165/70R365	1018 V1018	5 7	19 19	11 11
P185/80R13		175R14 P175/75R14 P175/80R14 P185/70R14		155R15 P155/80R15 P165R15 P165/80R15	P175/70R15	1022 V1022	5 6	19 19	12 12
175R13 P175/80R13 185R13 P185/70R13 P195/60R13	P195/70R13 P205/60R13 P215/50R13 P215/60R13	165R14 P175/70R14 P185/60R14 P185/65R14 P195/55R14	P195/60R14 205/55R14 P205/60R14 225/40R14	P185/55R15 P185/60R15 195/45ZR15 P195/50R15 205/45R15 205/50R15 195/45R16	205/40ZR16 205/45ZR16 215/40ZR16 205/40ZR17 205/35ZR18 P185/65R365 P180/65R390	1026 V1026	5 7	21 21	11 11
P185/85R13 195R13 P195/75R13 P205/70R13 P215/65R13	P185/75R14 P185/80R14 P195/65R14 P195/70R14 P195/75R14 P205/70R14 P215/60R14 P215/65R14 P245/50R14		175R15 P185/65R15 P185/70R15 P195/55R15 P195/60R15 P195/65R15 P205/60R15 P215/50R15		P225/50R15 P225/65R15 195/50R16 205/50R16 205/45ZR17 215/40ZR17 215/35R18 P190/65R390	1030 V1030	6 7	21 21	12 12
P235/50R13 P245/50R13	195R14 205R14 P215/70R14 P215/75R14 P225/60R14 P225/65R14 P235/60R14		185R15 P195/70R15 P195/75R15 P205/55R15 P205/65R15 P205/70R15 P215/55R15 P215/60R15 P225/55R15 P195/55R16 P205/55R16 P205/60R16 P205/65R16 P215/50R16 P215/55R16		P215/60R16 P225/50R16 P235/55R16 P245/45R16 P205/50R17 215/45ZR17 225/45ZR17 235/40ZR17 245/35ZR17 245/40R17 215/40ZR18 215/45ZR18 225/40ZR18 P220/55R390	1034 V1034	6 8	24 24	12 12
	215R14 225R14 P225/70R14 P225/75R14 P235/70R14 P245/60R14 P255/55R14 P255/60R14 P265/50R14		205R15 P205/75R15 P215/65R15 P215/70R15 P225/60R15 P225/70R15 P235/60R15 P235/65R15 P245/50R15 P205R16 P215/65R16 215/70R16 P225/55R16 P225/60R16 225/65R16 P235/50R16		P215/50R17 P215/55R17 215/60R17 P225/50R17 P225/55R17 235/45ZR17 235/50R17 245/45ZR17 P255/40R17 P225/45R18 225/50R18 235/40ZR18 235/45R18 245/40ZR18 P220/65R390	1038 V1038	6 8	24 24	13 13
	P245/70R14 P265/60R14 P275/60R14		235R15 P235/70R15 P245/60R15 P255/55R15 P255/60R15 P255/65R15 P265/50R15 P265/60R15 P275/50R15 215/75R16 P235/65R16 P245/50R16 P245/55R16 P255/50R16 P215/65R17 225/60R17		225/65R17 P235/55R17 P245/50R17 P255/45R17 275/40ZR17 225/60R18 235/50ZR18 235/55R18 245/45R18 245/50R18 255/40ZR18 255/45ZR18 275/35ZR18 245/40R19 255/35R19 245/35R20	1042 V1042	7 8	27 27	13 13


EC6080

EC6065


Emergency Tire Chain

Item No	Tire Size
EC6080-9	825-17; 9-19.5; 9.5-19.5; 750-20;825-20; 9.5-20; 8-22.5; 9-22.5;225/70-22.5; 245/70-19.5; 265/70-19.5;275/70-19.5; 285/70-19.5
EC6080-11	9.00-20; 10-22.5; 9.5-24; 305/70-19.5;275/70-22.5; 295/70-22.5; 295/60-22.5;305/60-22.5
EC6080-13	1000-20;1100-20; 1200-20; 1100-22;12.5-20; 11-22.5; 12-22.5; 13-22.5;11.2-24; 12/80-20; 13/80-20; 12/80-22.5;275/80-22.5; 295/80-22.5; 315/80-22.5;315/75-22.5; 305/75-24.5; 315/75-24.5;305/70-22.5; 315/70-22.5; 315/60-22.5

* You can choose square cross chains type or round twisted cross chains type

Stock	Description	Weight	Tire Size Range	No of Links	Length
EC6065-9	Twisted link	0.60Kgs/Pc	155/165/175/185/	9 links	Chain length:34cm
EC6065V-9	Twisted link with V-Bar	0.70Kgs/Pc	195/205-55/60/65		Total length with belt:89.5cm
EC6065-11	Twisted link	0.65Kgs/Pc	195/205	11 links	Chain length:38.5cm
EC6065V-11	Twisted link with V-Bar	0.75Kgs/Pc	215/225-55/60/65		Total length with belt:94cm
EC6065-12	Twisted link	0.68Kgs/Pc	225/235	12 links	Chain length:40cm
EC6065V-12	Twisted link with V-Bar	0.78Kgs/Pc	245/255-55/60/65		Total length with belt:96cm
EC6065-13	Twisted link	0.70Kgs/Pc	245/255/265	13 links	Chain length:43cm
EC6065V-13	Twisted link with V-Bar	0.80Kgs/Pc	275-55/60/65		Total length with belt:98.5cm

請自己確認剎車盤和輪轂之間間隙至少2cm以上。Please confirm the clearance of tire is more than 2cm

EC6050


Stock	Tire Size Range	Length
EC6050-S	Tire width between 145 to 175	Chain length:28cm Total length :74cm
EC6050-M	Tire width between 185 to 225	Chain length:37cm Total length :83cm
EC6050-L	Tire width between 235 to 295	Chain length:42cm Total length:98cm

One car mounted with 6pcs,8pcs or 10pcs

Mounting Instruction EC6065


Must be installed as tight as possible. Only to be used for short distances. For example a parking lot or driveway. Do not spin or exceed 5 mph. Always check disc brake clearance before using strap on tire chains!

Tyre Grip Tracks

CT2101

CT2101A:60*18CM
CT2101B:95*18CM
CT2101C:113*18CM


CT2102

CT2102A: 60*22CM
CT2102B: 80*22CM
CT2102C: 100*22CM
CT2102E: 120*22CM



Welded Shoe Chain


SC-9001

Size	Shoe Size			Boots Size	
		Men	Women	Men	Women
□ M	USA	5-9	6-10		
	EU	38-42	36.5-42		
	UK	5-8	4-7.5		
□ L	USA	9.5-12.5	10.5-UP	7.5-10.5	8.5-10.5
	EU	43-46.5	42.5-UP	40.5-44	40-42.5
	UK	8.5-11.5	8-UP	6.5-9.5	6.5-8
□ XL	USA	13-UP		10.5-11	
	EU	47-UP		44-45	
	UK	12-UP		9.5-10	

- 1.High-quality, made of welded highgrade steel.
- 2.TPU rubber sling remains flexible in sub-zero temperatures.
- 3.Sure grip - improves safety,most effective on packed and crusty snow.

TPU Shoe Spikes

One Spiker suit for all size shoe


SC-9010

Fitting Chart of Fabric/Textile Auto Snow Sock

- Meet S.A.E. class "S" clearance.
- Made of 100% high-technology fibers.
- Can be mounted on summer tyres and winter tyres
- Lightweight and quiet running.maximum speed 50 km/h.
- Environmental and recyclable,machine washable and easy to store.
- Packed in reusable plastic box or handbag.
- For radial and bias tires.ESP, ASC+T, ASR, ABS are all suitable.

Fabric/Textile Passenger Car Snow Sock

One pair/handbag,10 pairs/carton(master carton size:55*28*37cm)

No.Stock	Tire Sizes
70	145/70R13 155/65R13 155/70R13 165/65R13 175/60R13 185/55R13 195/55R13 135/80R13 135/70R14 165/55R14 185/50R14 185/45R15
71	145/80R13 165/70R13 175/65R13 185/60R13 195/60R13 145/70R14 165/60R14 185/55R14 155/65R14 175/60R14 205/50R14 145/65R15 155/60R15 175/50R15 185/50R15 195/45R15 195/40R16
72	165/80R13 185/70R13 195/70R13 155/80R14 195/60R14 175/70R14 205/60R14 185/65R14 135/80R15 155/70R15 165/65R15 175/60R15 185/60R15 195/55R15
73	175/80R14 215/65R14 205/70R14 235/60R14 165/80R15 175/75R15 185/70R15 195/65R15 215/60R15 235/55R15 195/60R16 215/55R16 235/50R16 205/50R17 235/45R17 205/45R18 225/40R18
74	225/70R14 185/80R15 205/70R15 225/65R15 195/75R15 215/70R15 245/60R15 175/75R16 205/65R16 225/60R16 185/75R16 215/65R16 245/55R16 185/65R17 225/55R17 215/50R18 215/55R17 245/50R17 235/45R18 265/40R18
75	205/80R14 235/70R14 215/75R14 195/80R15 255/60R15 205/75R15 255/75R15 175/80R16 235/60R16 205/70R16 255/55R16 185/70R17 235/55R17 205/55R18 215/60R17 255/50R17 225/50R18 235/50R18 255/45R18 245/45R18
76	205/65R13 225/60R13 215/60R13 165/75R14 225/55R14 205/50R15 235/45R15 215/50R15 175/55R16 195/50R16 215/45R16 205/45R16 225/40R16 255/35R16 195/40R17 225/35R17 205/40R17 245/35R17 225/50R18
77	175/80R13 235/60R13 205/70R13 165/80R14 175/75R14 205/65R14 215/65R14 185/70R14 195/65R14 145/80R15 175/65R15 165/70R15 185/65R15 195/60R15 215/55R15 205/55R15 225/50R15 255/45R15 175/60R16 185/55R16 225/45R16 195/55R16 205/50R16 215/50R16 255/40R16 175/55R17 205/45R17 195/45R17 215/40R17 225/40R17 205/40R18 225/35R18 215/35R18 235/35R18 255/30R18 235/40R17
78	185/80R13 185/75R14 195/70R14 225/60R14 155/80R15 205/60R15 175/70R15 225/55R15 245/50R15 205/55R16 185/65R16 225/50R16 245/45R16 215/45R17 245/40R17 225/45R17 245/35R18 215/40R18
79	175/80R15 205/65R15 195/70R15 215/65R15 225/60R15 165/75R16 235/60R15 175/70R16 185/65R16 195/80R14 185/80R14 195/75R14 215/70R14 245/60R14 205/75R14 205/60R16 215/60R16 225/55R16 195/65R16 235/55R16 185/60R17 205/55R17 215/50R17 225/50R17 235/50R17 245/45R17 215/45R18 225/45R18 235/40R18 245/40R18 245/50R18
80	215/80R14 215/75R15 225/75R15 195/75R16 215/70R16 225/65R16 245/60R16 225/60R17 245/55R17
81	155/80R13 185/65R13 175/70R13 205/60R13 195/65R13 225/55R13 135/80R14 145/80R14 165/70R14 175/65R14 165/65R14 185/60R14 205/55R14 195/55R14 155/70R14 135/70R15 155/65R15 145/70R15 165/60R15 175/55R15 195/50R15 185/55R15 215/45R15 175/50R16 205/40R16 215/40R16 195/45R16 215/35R17

Fabric/Textile 4x4 Snow Sock

One pair/handbag,5 pairs/carton(master carton size:31.5*28.5*56cm)

No.Stock	Tire Sizes
KD442	215/40R18 175/80R14 185/75R14 195/70R14 205/70R14
KD443	185/60R17 205/55R17 225/50R17 185/80R14 195/75R14 215/70R14 175/80R15 195/70R15 205/65R15 165/75R16 175/70R16 185/65R16 195/65R16 205/60R16 225/55R16 215/45R18 225/45R18 215/65R15 225/60R15
KD444	175/75R16 205/65R16 215/60R16 195/80R14 205/75R14 215/75R14 225/70R14 185/80R15 195/75R15 205/70R15 225/65R15 235/60R15 215/50R18 225/40R19 225/60R16 185/65R17 215/55R17
KD445	205/55R18 225/50R18 205/80R14 215/80R14 195/80R15 205/75R15 215/70R15 225/70R15 175/80R16 185/80R16 185/75R16 195/75R16 205/70R16 215/65R16 225/65R16 185/70R17 225/60R17
KD446	235/55R18 245/50R18 255/50R18 275/45R18 245/45R19 255/45R19 215/75R15 225/75R15 235/70R15 255/65R15 275/60R15 195/80R16 205/75R16 215/70R16 225/70R16 235/65R16 255/60R16 235/60R17 255/55R17 275/50R17 275/40R19 245/40R20 245/35R21 255/35R21 265/30R22
KD447	225/60R18 235/60R18 245/55R18 255/55R18 275/50R18 245/50R19 255/50R19 215/80R15 225/80R15 235/75R15 245/70R15 255/70R15 205/80R16 215/75R16 235/70R16 255/65R16 275/60R16 215/70R17 235/65R17 245/60R17 255/60R17 275/55R17 275/45R19 285/45R19 275/40R20 285/40R20 285/35R21 285/30R22
KD448	235/65R18 255/60R18 265/55R18 255/55R19 275/50R19 245/75R15 255/75R15 265/70R15 215/80R16 225/75R16 245/70R16 255/70R16 225/70R17 235/70R17 245/65R17 265/60R17 275/60R17 205/75R17 255/50R20 265/45R20 295/40R20 265/35R22 285/35R22
KD449	265/55R19 275/55R19 265/50R20 295/45R20 215/75R18 265/60R18 275/60R18 285/55R18 265/75R15 215/85R16 235/80R16 245/75R16 265/70R16 285/65R16 245/70R17 265/65R17 285/60R17
KD450	285/60R18 285/55R19 285/50R20 235/85R16 265/75R16 275/70R16 265/70R17 275/65R17 255/50R21 285/45R21 305/35R23
KD451	255/40R18 275/35R18 285/35R18 245/35R19 255/35R19 245/60R14 235/55R16 245/50R16 255/50R16 235/50R17 245/45R17 255/45R17 275/40R17 285/40R17 285/30R19 295/30R19 255/30R20 295/25R20
KD452	245/45R18 265/40R18 275/40R18 285/40R18 235/70R14 265/60R14 245/60R15 275/55R15 285/50R15 295/50R15 245/55R16 265/50R16 245/50R17 275/45R17 295/40R17 295/35R18 235/40R19 245/40R19 265/35R19 275/35R19 285/35R19 305/30R19 245/35R20 275/30R20 285/30R20
KD453	255/60R15 305/50R15 235/60R16 245/60R16 255/55R16 295/50R16 235/55R17 245/55R17 255/50R17 235/50R18 255/45R18 295/40R18 235/45R19 255/40R19 295/35R19 255/35R20 265/35R20 275/35R20 285/30R21 295/25R22
KD454	285/50R18 285/45R18 295/45R18 285/40R19

If your tire size is not shown on this table, Please email us, we can design and produce for you according to your tire size



Fabric/Textile Auto Snow Sock



Maximum speed



Machine washable



Suitable for ABS / ESP



Quick & simple No Tools



Suitable for Summer / Winter tyres



KA



KB



KC



XA



XB



GS



FA



FB



TC



HB



KE



SA

Fitting Instruction



More new design is coming...



STEP 1



STEP 2



STEP 3



STEP 4

1. Using the gloves provided slip the traction aids over the top side of the driving wheel so that the elastic holds them in place
2. Pull the traction aids around the outside of the wheel and as close to the ground as you can.
3. Roll the car forward so that the wheels go through half a turn.
4. Slip the traction aids over the remainder of the wheel. Checking that the fit is even all the way round.


⚠ This product does not replace a snow chain - Use snow chains in heavy snow fall or extreme gradients
 For use on snow ONLY. If the asphalt is visible remove the covers to avoid damaging them
 Install covers on vehicles driving wheels ONLY
 Use correct size covers for your tyres
 For private cars only, not for commercial vehicles such as vans and trucks
 DO NOT exceed 50km per hour
 Check textile covers regularly - excessively worn or ripped covers will be ineffective and can be dangerous
 DO NOT brake or accelerate abruptly with the covers in use
 Compatible with vehicles using ESP and ABS
 Remove and wash the covers in between uses making sure they are dry before storage.



ATLI Single Truck Highway Service Chains



- Twist link cross chain
- Recommended for highway use
- Available in regular or cam side chain

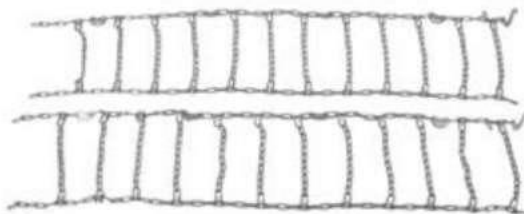

Side Chain Available with CAM




Tire sizes					non-cam stock no.	cam stock no.	Weight Per Pair	cross chains Per 1/2 Pair	replacement cross chain
7.00-14LT	P205/75R14	205/60R17.5			2209	2209 CAM	19	11	6219
185-14	195/75R14LT	28X8.50-14							
H70-14ST	H78-15ST	6.70-15LT	P215/75R15	7-17.5LT	2211	2211 CAM	23	13	6219
H78-14ST	LR78-15	7.00-15LT	195/75R15LT						
9-14.5MH	P235/75R15	8.00-16.5	225/75R16LT	235/65R17	2216	2216 CAM	22	12	6221
215/75R14LT	215/75R15LT	P225/70R16	255/75R16LT						
H78-15LT	30X9.50-15	P225/75R16	P235/60R17						
P225/75R15	6.50-16LT	205R16	P235/65R17						
7.00-15TR	245/75R15LT	235/75R16LT	8-17.5	P255/45R18	2219	2219 CAM	24	13	6221
7.50-15LT	7.00-16LT	245/70R16LT	8.50-17.5	225/65R18					
P275/60R15	8.75-16.5	255/65R16LT	215/70R17.5	235/60R18					
235/75R15LT	215/80R16LT	8.75-16LT	P235/50R18	235/65R18					
245/70R15LT	215/85R16LT	P235/70R17		245/55R19					
NR78-15	LR78-16	235/85R16LT			2221	2221 CAM	26	14	6221
7.50-15TR	7.50-16LT	7.00-17LT							
275/60R15LT	9.50-16.5	215/75R17.5			2229	2229 CAM	24	12	6225
7.50-17	245/70R17LT	225/70R17.5	7.00-18	8-19.5					
P245/65R15	P245/75R16	265/60R16LT	P245/55R17	275/60R17					
P245/70R15	P255/65R16	275/60R16LT	245/65R17	P255/55R18					
P255/70R15	P255/70R16	30X9.50-16LT	P245/65R17	255/55R18					
P265/70R15	P275/60R16	31X11.50-16	P245/70R17	255/60R18					
P265/75R15	235/70R16LT	32X9-16LT	P255/55R17	235/55R19					
255/75R15LT	235/80R16	32X10.00-16LT	P255/60R17						
29X9.50-15	245/75R16LT	10-16.5LT	P255/65R17						
P235/70R16	255/70R16LT	225/75R17LT	P275/60R17						
P245/70R16	265/50R16LT	P235/75R17							
8.25-15TR	255/85R16LT	275/55R20	P275/60R20		2228	2228 CAM	27	14	6225
P275/70R16	245/70R19.5				n/a	2233 CAM	38	11	6251
7.50-18	265/70R19.5	6.50-20	7.00-20						
9.00-15TR	9R17.5		8-22.5	255/70R22.5	2237	2237 CAM	40	12	6251
9.00-16LT	10R17.5	7.50-20	235/80R22.5		2239	2239 CAM	44	13	6251
10-15TR	8.25-20	245/75R22.5	275/70R22.5						
11R17.5	9-22.5		QR78-16		2241	2241 CAM	46	14	6251
9.00-20	10-22.5	255/80R22.5	265/75R22.5		2245	2245 CAM	49	15	6251
10.00-20	11-22.5	275/80R22.5			2247	2247 CAM	48	14	6253
295/75R22.5	305/70R22.5	285/75R24.5	275/80R24.5		2249	2249 CAM	53	15	6253
10.00-22	11-24.5				2251	2251 CAM	62	14	6260
11.00-15TR	11.00-20	12-22.5	12.5-22.5	295/80R22.5	2255	2255 CAM	67	14	6263
12.00-20	13/80R20	11.00-22	315/80R22.5	12-24.5	2257	2257 CAM	75	16	6263
13.00-20	14/80R20	365/80R20	12.00-24		2273	2273 CAM	87	18	6266

If your tire size is not shown on this table, Please email us, we can design and produce for you according to your tire size

ATLI Reinforced Single Truck Chains



- Reinforced cross chain for increased traction and wear
- Recommended for off-road use
- Available in regular or cam side chain

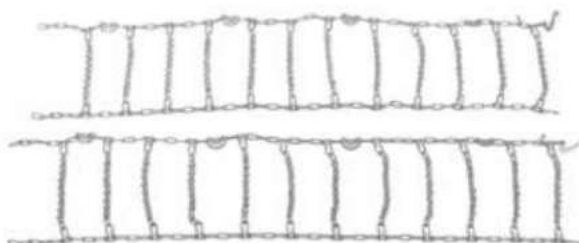
V-BAR

Side Chain Available with CAM


Tire sizes					n on-cam stock n o.	cam stock n o.	Weight Per Pair	cross chains Per 1/2 Pair	r eplacement cross chain
7.00-14LT	P205/75R14	205/60R17.5			2809	2809 CAM	21	11	6819
185-14	195/75R14LT	28X8.50-14							
H70-14ST	H78-15ST	6.70-15LT	P215/75R15	7-17.5LT	2811	2811CAM	26	13	6819
H78-14ST	LR78-15	7.00-15LT	195/75R15LT						
9-14.5MH	P235/75R15	8.00-16.5	225/75R16LT	235/65R17	2816	2816 CAM	25	12	6821
215/75R14LT	215/75R15LT	P225/70R16	255/75R16LT						
H78-15LT	30X9.50-15	P225/75R16	P235/60R17						
P225/75R15	6.50-16LT	205R16	P235/65R17						
7.00-15TR	245/75R15LT	235/75R16LT	8-17.5	225/65R18					
7.50-15LT	7.00-16LT	245/70R16LT	8.50-17.5	235/60R18	2819	2819 CAM	25	13	6821
P275/60R15	8.75-16.5	255/65R16LT	215/70R17.5	235/65R18					
235/75R15LT	215/80R16LT	8.75-16LT	P235/50R18	245/55R19					
245/70R15LT	215/85R16LT	P235/70R17	P255/45R18						
NR78-15	LR78-16	235/85R16LT							
7.50-15TR	7.50-16LT	7.00-17LT			2821	2821 CAM	27	14	6821
275/60R15LT	9.50-16.5	215/75R17.5							
7.50-17	245/70R17LT	225/70R17.5	7.00-18	8-19.5	2814	2814 CAM	32	15	6821
P245/65R15	P245/70R16	255/70R16LT	10-16.5LT	225/75R17LT					
P245/70R15	P245/75R16	265/50R16LT	P235/75R17	245/65R17	2829	2829 CAM	26	12	6825
P255/70R15	P255/65R16	265/60R16LT	P245/55R17	275/60R17					
P265/70R15	P255/70R16	275/60R16LT	P245/65R17	P255/55R18					
P265/75R15	P275/60R16	30X9.50-16LT	P245/70R17	255/55R18					
255/75R15LT	235/70R16LT	31X11.50-16	P255/55R17	255/60R18					
29X9.50-15	235/80R16	32X9-16LT	P255/60R17	235/55R19					
P235/70R16	245/75R16LT	32X10.00-16LT	P255/65R17						
			P275/60R17						
8.25-15TR	255/85R16LT	P275/60R20	275/55R20		2828	2828 CAM	30	14	6825
P275/70R16	245/70R19.5								
7.50-18	265/70R19.5	6.50-20	7.00-20		2833	2833 CAM	43	11	6822
9.00-15TR	9R17.5	7.50-20	8-22.5	255/70R22.5	2837	2837 CAM	44	12	6822
9.00-16LT	10R17.5	235/80R22.5			2839	2839 CAM	47	13	6822
10-15TR	8.25-20	245/75R22.5	QR78-16						
11R17.5	9-22.5	275/70R22.5			2841	2841 CAM	51	14	6822
9.00-20	10-22.5	255/80R22.5	265/75R22.5						
10.00-20	11-22.5	275/80R22.5			2845	2845 CAM	54	15	6822
295/75R22.5	305/70R22.5	285/75R24.5	275/80R24.5		2847	2847 CAM	54	14	6853
10.00-22	11-24.5				2849	2849 CAM	57	15	6853
11.00-15TR	11.00-20	12-22.5	12.5-22.5	295/80R22.5	2851	2851 CAM	68	14	6860
12.00-20	13/80R20	11.00-22	315/80R22.5	12-24.5	2855	2855 CAM	71	14	6863
14.00-20	14.00R21	13.00-24			2871	2871 CAM	80	16	6866
14.00-24					2873	2873 CAM	94	18	6866

If your tire size is not shown on this table, Please email us, we can design and produce for you according to your tire size

ATLI Wide Base Truck Chains



ATLI Wide Base Single Truck Chains

Tire sizes					non-cam stock no.	cam stock no.	Weight Per Pair	cross chains Per 1/2 Pair	replacement cross chain
8.25-15LT	P265/70R16	295/50R16LT	265/70R17LT	255/70R18	3210	3210 CAM	26	13	6225
10-15LT	P265/75R16	235/80R17	275/65R17	275/55R18					
265/70R15LT	245/85R16LT	245/75R17LT	235/75R17.5	265/50R19					
265/75R15LT	265/70R16LT	255/60R17	245/70R17.5	275/55R19					
305/50R15	265/75R16LT	P255/70R17	255/65R18	225/70R19.5					
31X10.50-15LT	265/80R16LT	P265/65R17	P255/70R18		3227	3227 CAM	36	10	6253
33X10.50-15	275/70R16LT	P265/70R17	P265/65R18						
PR78-15	33X13.50-15	275/65R16LT	31X10.50-16.5LT	285/60R18					
11-15LT	34X9.50-15LT	285/60R16LT	285/60R17	285/65R18LT					
31X11.50-15LT	PR78-16	32X11.50-16LT	285/70R17	285/45R19					
32X11.50-15LT	12-16.5LT	33X13.50-16	305/45R17	275/60R20	3228	3228 CAM	36	9	6259
33X9.50-15LT	P285/60R16	34X9-16	P265/60R18	P285/50R20					
285/75R16LT	265/70R18	P275/60R18	275/65R18	275/70R18LT					
31X12.50-16									
12-15LT	35X12.50-15	35X12.5-16	295/70R17LT	275/65R20LT	3229	3229 CAM	39	10	6259
P315/70R15	35X14.5-15	35X13.5-16	305/70R17	285/55R20LT					
325/60R15	11L16	36X13-16	33X12.50-17	305/50R20					
31X13.5-15	285/70R16LT	32X12.50-16.5LT	10.50/80R18	305/55R20					
32X12.50-15	295/75R16LT	33X12.5-16.5	285/75R18LT	32X11.50-20					
33X12.50R15	305/70R16LT	33X15.5-16.5	325/60R18	33X12.5-20	3231	3231 CAM	42	11	6259
33X14-15	305/85R16LT	275/70R17	33X12.5-18	285/50R22					
33X14.50-15	315/75R16LT	285/75R17LT	33X13-18	33X11.5-22					
QR78-15	38X13-16	35X12.50-17	325/65R18	325/50R22LT					
35X13.5-15	38X12.50-16.5	37X12.50-17	35X12.5-18	35X12.5-22					
37X13-15	315/70R17LT	305/60R18	325/60R20	295/60R22.5	3235	3235 CAM	46	12	6259
345/55R16LT	325/70R17	305/70R18LT	35X12.50-20						
37X12.50-16	345/55R17								
35X14-15	37X13.50-15	36X12.5-16.5	37X12.5-16.5	37X13.5-17					
36X12.50-15	35X14-16	36X14-16.5	38X15.5-16.5	14-17.5					
37X14.50-15	40X17-15	325/80R16	40X17-16.5	37X13.50-20	3251	3251 CAM	45	10	6267
39.5X15-15	38X14.50-16	39.5X15-16.5	355/65R18	37X13.50-22					
355/80R20	13-22.5	15-22.5	385/65R22.5						
42X15-16.5	335/80R18	355/60R20	38X13.5-20						
18-22.5	445/65R22.5								
38.5X16-15	39.5X15-16	39.5X18-16.5	15-19.5		3265	3265 CAM	57	11	7215
39.5X18-15	38.5X16-16	38X15.5-18	38X15.50-20						
445/50R22.5	455/55R22.5								
445/65R19.5	16.5-22.5	425/65R22.5							

If your tire size is not shown on this table, Please email us, we can design and produce for you according to your tire size

ATLI Reinforced Wide Base Single Truck Chains

Tire sizes					stock no.	Weight Per Pair	cross chains Per 1/2 Pair	replacement cross chain
8.25-15LT	P265/70R16	295/50R16LT	265/70R17LT	P265/65R18	3810	31	13	6825
10-15LT	P265/75R16	235/80R17	275/65R17	275/55R18				
265/70R15LT	245/85R16LT	245/75R17LT	235/75R17.5	265/50R19				
265/75R15LT	265/70R16LT	255/60R17	245/70R17.5	275/55R19				
305/50R15	265/75R16LT	P255/70R17	255/65R18	225/70R19.5				
31X10.50-15LT	265/80R16LT	P265/65R17	P255/70R18		3827	41	10	6853
33X10.50-15	275/70R16LT	P265/70R17	255/70R18					
PR78-15	33X13.50-15	275/65R16LT	31X10.50-16.5LT	285/60R18				
11-15LT	34X9.50-15LT	285/60R16LT	285/60R17	285/65R18LT				
31X11.50-15LT	PR78-16	32X11.50-16LT	285/70R17	285/45R19				
32X11.50-15LT	12-16.5LT	33X13.50-16	305/45R17	275/60R20	3829	44	10	6834
33X9.50-15LT	P285/60R16	34X9-16	P265/60R18	P285/50R20				
12-15LT	35X12.50-15	35X12.5-16	295/70R17LT	275/65R20LT				
P315/70R15	35X14.5-15	35X13.5-16	305/70R17	285/55R20LT				
325/60R15	11L16	36X13-16	33X12.50-17	305/50R20				
31X13.5-15	285/70R16LT	32X12.50-16.5LT	10.50/80R18	305/55R20	3829	44	10	6834
32X12.50-15	295/75R16LT	33X12.5-16.5	285/75R18LT	32X11.50-20				
33X12.50R15	305/70R16LT	33X15.5-16.5	325/60R18	33X12.5-20				
33X14-15	305/85R16LT	275/70R17	33X12.5-18	285/50R22				
33X14.50-15	315/75R16LT	285/75R17LT	33X13-18	33X11.5-22				

If your tire size is not shown on this table, Please email us, we can design and produce for you according to your tire size

ATLI Dual-Triple Truck Chains



Twist link case hardened cross chain
Recommended for highway use
Available in regular or cam side chain



ATLI Dual-Triple Truck Chains - 42S

Tire sizes					non-cam stock no.	cam stock no.	Weight Per Pair	cross chains Per 1/2 Pair	replacement cross chain
7.00-15TR	8.75-16.5	8.75-16LT	8.50-17.5		4219	4219 CAM	44	26	6221
7.50-15LT	215/80R16LT	P235/70R17	215/70R17.5						
7.00-16LT	215/85R16LT	8-17.5							
NR78-15	LR78-16LT	7.50-16LT	235/85R16LT	7.00-17LT	4221	4221 CAM	49	28	6221
7.50-15TR		9.50-16.5		215/75R17.5					
8.25-15TR	255/85R16LT	245/70R19.5			4231	4231 CAM	51	28	6225
10.00-15TR	11R17.5	9-22.5	275/70R22.5		4239	4239 CAM	84	26	6251
QR78-16	8.25-20	245/75R22.5							
9.00-20	10-22.5	255/80R22.5	265/75R22.5		4241	4241 CAM	84	28	6251
10.00-20	11-22.5	275/80R22.5			4245	4245 CAM	90	30	6251
295/75R22.5	305/70R22.5	275/80R24.5	285/75R24.5		4247	4247 CAM	89	28	6253
10.00-22	11-24.5				4249	4249 CAM	92	30	6253
11.00-15TR	11.00-20	12-22.5	12.5-22.5	295/80R22.5	4251	4251 CAM	113	28	6260
12.00-20	13/80R20	11.00-22	315/80R22.5	12-24.5	4255	4255 CAM	115	28	6263
14/80R20	13.00-20	365/80R20	12.00-24		4257	4257 CAM	134	32	6263

If your tire size is not shown on this table, Please email us, we can design and produce for you according to your tire size



- Reinforced cross chain for increased traction and wear
- Recommended for off-road use
- Available in regular or cam side chain



ATLI Reinforced Dual-Triple Truck Chains - 48S

Tire sizes					non-cam stock no.	cam stock no.	Weight Per Pair	cross chains Per 1/2 Pair	replacement cross chain
7.00-15TR	8.75-16.5	8.75-16LT	8.50-17.5		4819	4819 CAM	49	26	6821
7.50-15LT	215/80R16LT	P235/70R17	215/70R17.5						
7.00-16LT	215/85R16LT	8-17.5							
NR78-15	LR78-16LT	9.50-16.5	7.00-17LT		4821	4821 CAM	53	28	6821
7.50-15TR	7.50-16LT	235/85R16LT	215/75R17.5						
9.00-20	10-22.5	255/80R22.5	265/75R22.5		4841	4841 CAM	95	28	6822
10.00-20	11-22.5	275/80R22.5			4845	4845 CAM	99	30	6822
295/75R22.5	305/70R22.5	275/80R24.5	285/75R24.5		4847	4847 CAM	102	28	6853
10.00-22	11-24.5				4849	4849 CAM	104	30	6853
11.00-15TR	11.00-20	12-22.5	12.5-22.5	295/80R22.5	4851	4851 CAM	118	28	6860
12.00-20	13/80R20	11.00-22	315/80R22.5	12-24.5	4855	4855 CAM	124	28	6863

If your tire size is not shown on this table, Please email us, we can design and produce for you according to your tire size

ATLI Mud Service Chains



- Extra heavy-duty for off-road use
- Available in domestic or import
- Available in single and dual-triples



Side Chain Available with CAM



ATLI Single Mud Service Truck Chains

Tire sizes					stock no.	Weight Per Pair	cross chains Per 1/2 Pair	replacement cross chain
7.00-15TR	9.00-15TR	8.75-16.5	235/70R16LT	215/70R17.5	2435	36	9	6256
7.50-15LT	235/75R15LT	215/85R16LT	245/70R16LT					
7.50-15TR	7.00-16LT	225/75R16LT	8-17.5					
NR78-15	265/75R15	31X10.50-15	9.50-16.5	235/80R17	2437	39	10	6256
P245/70R15	P275/60R15	LR78-16LT	12-16.5	215/75R17.5				
P255/70R15	275/60R15LT	7.50-16LT	7.00-17LT					
255/65R15LT	30X9.50-15LT	235/85R16LT			2439	40	10	6260
33X10.50-15	7.50-17	7.00-18	225/70R19.5					
245/75R16LT	225/70R17.5	8-19.5	245/70R19.5					
285/75R16	285/70R17				2440	44	11	6260
315/75R16	235/75R17.5	7.50-20	235/80R22.5	255/70R22.5	2441	61	11	6434
10.00-15TR	8.25-20	9-22.5	245/75R22.5	255/80R22.5				
10-15LT								
9.00-20	10-22.5	265/75R22.5			2445	67	12	6434
10.00-20	11-22.5	275/70R22.5			2448	72	13	6434
11.00-20	12-22.5	295/75R22.5	275/80R24.5		2452	77	14	6434
10.00-22	275/80R22.5	11-24.5	285/75R24.5					
12.00-20	11.00-22	12-24.5						
13/80R20	315/80R22.5				2486	92	14	6438
295/80R22.5	11.00-24				2470	99	15	6438



- Extra heavy-duty for off-road use
- Available in domestic or import
- Available in single and dual-triples



Side Chain Available with CAM



ATLI Dual-Triple Mud Service Truck Chains

Tire size					stock no.	Weight Per Pair	cross chains Per 1/2 Pair	replacement cross chain
NR78-15	30X9.50-15LT	7.50-16LT	7.00-17LT		4412	70	20	6256
P245/70R15	31X10.50-15	235/85R16LT	235/80R17					
P255/70R15	LR78-16LT	9.50-16.5	215/75R17.5					
10.00-15TR	235/75R17.5	7.50-20	235/80R22.5	255/70R22.5	4435	123	22	6434
10-15LT	8.25-20	9-22.5	245/75R22.5	255/80R22.5				
9.00-20	10-22.5	265/75R22.5						
10.00-20	11-22.5	275/70R22.5			4448	139	26	6434
11.00-20	12-22.5	295/75R22.5	275/80R24.5					
10.00-22	275/80R22.5	11-24.5	285/75R24.5					
12.00-20	11.00-22	12-24.5			4486	174	28	6438
13/80R20	315/80R22.5							
295/80R22.5	11.00-24							
					4470	187	30	6438

ATLI Square Straight Link ALloy Truck Chains



- Square link alloy construction for increased durability and traction
- Reversible for extended use on both sides
- Well proven product, provides more traction than other square link products
- Ideal for off-road use
- 7mm and 8mm are available



Side Chain Available with CAM



ATLI 5.5mm Square Straight Link Alloy Light Truck Chains

Tire sizes					stock no.	Weight Per Pair	cross chains Per 1/2 Pair	replacement cross chain
P225/75R15 205R16 H78-15LT	P235/75R15 6.50-16LT	225/75R16LT 215/75R14LT	9-14.5MH P235/65R17	215/75R15LT 8.00-16.5	2116 CAM	21	11	9311
P235/70R16 P245/70R16 P245/75R16 P275/60R15	8.75-16.5 215/80R16LT 215/85R16LT 215/70R17.5	255/65R16 8.50-17.5 235/75R15LT 235/75R16LT	245/70R16LT 245/75R15LT 7.00-15TR 7.00-16LT	7.50-15LT 8-17.5	2119 CAM	23	12	9311
P265/75R15 275/60R15LT NR78-15	215/75R17.5LT 7.00-17LT LR78-16LT	235/85R16LT 7.50-15TR 9.50-16.5	245/75R16LT 7.50-16LT		2121 CAM	25	12	9311
P245/70R15 P255/55R18 P255/70R15 255/55R18	235/70R16LT 30X9.50-16 32X10-16 235/75R17.5LT	255/75R15LT 32X9-16 30X9.50-15	10-16.5 29X9.50-15 P275/60R16	31X11.5-16 P245/65R17 P255/60R17	2129 CAM	24	13	9313
10-15LT KR78-15	8.25-15 255/70R16LT	265/70R15LT 245/85R16LT	265/75R15LT 31X10.5-15LT		3110 CAM	26	12	9313
11-15LT 32X11.5-15LT PR78-15 P275/60R17 265/75R16LT	12-16.5LT 34X9.50-15 34X9X16 265/70R17LT 225/70R19.5LT	10-17.5 PR78-16 32X11.5X16 P265/70R16 8.25-15TR	31X10.5-16.5 31X11.5-15LT 275/70R16LT 245/70R19.5LT 255/85R16LT	33X13.5-15 33X13.5-16 275/60R20 275/55R20	3127 CAM	27	13	9313
12-15LT 33X12.50R16.5 305/85R16LT 33X14.5-15	11L16 33X14X15 325/60R18 35X12.5-17	285/75R16LT 36X13X16 315/75R16LT 35X13.5-15	P315/70R15 31X13.50-15 35X13.5-16	32X12.50R15 295/75R16 35X14.5-15	3129 CAM	31	14	9315

ATLI 7mm Square Straight Link Alloy Chains

Tire sizes					singles				dual-Triples				cross chain
					non-cam stock no.	cam stock no.	Weight Per Pair	cross chains Per 1/2 Pair	non-cam stock no.	cam stock no.	Weight Per Pair	cross chains Per 1/2 Pair	
7.00-15TR 8.50-17.5 235/75R16LT	7.50-15LT 235/75R15LT 215/70R17.5	7.00-16LT 245/70R15LT 245/70R17.5	8.75-16.5 215/80R16 245/75R15LT	8-17.5 215/85R16LT	2119	n/a	37	9	n/a	n/a	N/A	N/A	9413
7.50-15TR 245/75R16LT	7.50-16LT 215/75R17.5LT	9.50-16.5 LR78-16LT	7.00-17LT NR78-15	235/85R16LT 275/60R15LT	2121	n/a	41	10	n/a	n/a	N/A	N/A	9413
10.00-20 305/70R22.5	11-22.5 275/80R24.5	275/70R22.5 285/75R24.5	275/80R22.5	295/75R22.5	2147	2147lg	56	14	4147	4147lg	93	28	9413
10.00-22	11-24.5				2149	2149lg	60	15	4149	4149lg	103	30	9413

ATLI 8mm Square Straight Link Alloy Chains

Tire sizes					singles				dual-Triples				cross chain
					non-cam stock no.	cam stock no.	Weight Per Pair	cross chains Per 1/2 Pair	non-cam stock no.	cam stock no.	Weight Per Pair	cross chains Per 1/2 Pair	
10.00-20 305/70R22.5	11-22.5 275/80R24.5	275/70R22.5 285/75R24.5	275/80R22.5	295/75R22.5	2145hd	2145hdlg	80	13	4145hd	4145hdlg	135	26	9511
10.00-22	11-24.5				2149hd	2149hdlg	85	14	4149hd	4149hdlg	146	28	9513

ATLI Diamond Truck Chain-TN/TND



TN (Net Regular Type)

- * Truck and Heavy Vehicle Chain
- * High traction on snow and ice thanks to its "D" shape chains.
- * Anti-wear heat treatment.Zinc Plated.
- * Good road handing and comfortable ride.
- * Tightening with tensioning chain and lever.
- * Packing: cotton bag on pallet



TND (link over link)

Tire sizes	TN stock no.	Weight Per Pair	TND stock no.	Weight Per Pair
185-14;700-14;640-15;185/75-14;195/70-14	TN210		TND210	
195-14;670-14;185-15;175-16;195/75-14; 175/75-16; 195/70-15;205/65-15;195/65-16	TN220		TND220	
205-14;195-15;205/75-14;195/75-15;205/75-15; 185/75-16;205/70-15;215/65-15;205/65-16	TN225		TND225	
215-14;750-14;670-15;185-16;195-16;600-16;640-16; 8.00-16.5;215/75-14;195/75-16; 215/70-15;225/70-15; 215/70-16;215/65-16	TN230		TND230	
215-15;700-15;205-16;650-16;7-17.5;205/80-16; 215/75-15;225/75-15;205/75-16;255/60-15;235/60-16	TN240		TND240	
28x9-15;215-16;235/75-15;235/70-15;215/80-16; 215/75-16;225/75-16;225/70-16	TN245		TND245	
27x8.50-15	TN246		TND246	
30x9.50-15;8.40-15;235/70-16	TN247		TND247	
250-15;250/70-15	TN248		TND248	
9-15;750-15;700-16;8-17.5;205/75-17.5;215/75-17.5 ; 265/70-15;245/70-16;255/65-16	TN250		TND250	
10-15;255/75-15;265/75-15;31x10.50-15;255/70-16; 275/55-17	TN255		TND255	
10-16.5;10.0/80-12;10.0/75-15.3	TN258		TND258	
750-16;8.5-17.5;7-19.5;235/85-16;225/75-17.5	TN260		TND260	
29x12.50-15	TN263		TND263	
29x13.50-15	TN264		TND264	
31x11.50-15;265/75-16;265/70-16	TN265		TND265	
32x11.50-15;275/70-16;265/70-17	TN267		TND267	
31x15.50-15	TN268		TND268	
825-15;825-16;9.5-17.5;250/80-18;235/75-17.5; 700-18;750-18;8-19.5;650-20;700-20	TN270		TND270	
250/80-16	TN273		TND273	
245/70-19.5;265/70-19.5	TN275		TND275	
10.5-18;10.5/80-18;275/80-18;9.5-20	TN277		TND277	
825-17;10-17.5;9-19.5;9.5-19.5;750-20;800-20;225/90-20;8-22.5	TN280		TND280	
11.00-16;825-20;9-22.5;8.3-24;255/70-22.5	TN290		TND290	
305/70-19.5;295/60-22.5;285/60-22.5	TN295		TND295	
12-16.5;33x 12.50-15;11.5/80-15.3;285/75-16	TN296		TND296	
900-20;10-22.5;C22.5 Pilote;11/70-22.5;9.5-24; 275/70-22.5;295/70-22.5;305/60-22.5;315/60-22.5	TN300		TND300	
1000-20;D20 Pilote;11-22.5;D22.5 Pilote;12.4-20; 12/80-20;275/80-22.5;305/70-22.5;315/70-22.5	TN310		TND310	
1100-20;E22.5 Pilote;315/80-22.5;315/75-22.5; 305/75-24.5;315/75-24.5	TN320		TND320	
1200-20;1100-22;13-22.5;1000-24	TN330		TND330	
900-16;255/100-16;275/70-19.5;285/70-19.5	TN350		TND350	
11.2-20;10.5-20;275/80-20 ;300/70-20	TN358		TND358	
12.5-18;12.5/80-18 ;335/80-18;320/70-20	TN360		TND360	
13.6-16;12.5-20 E20 Pilote;11.2-24;13/80-20;12-22.5; 12/80-22.5;335/80-20;295/80-22.5;13/75-22.5	TN370		TND370	
1300-20 Pilote;14.75/80-20	TN380		TND380	
1400-20	TN390		TND390	
1200-24;F24 Pilote;14/80-24	TN400		TND400	
14.5-20;F20 Pilote ;15-22.5;14/80-20;365/80-20; 375/75-20;385/65-22.5 ;320/70-24	TN520		TND520	
16.5-22.5;425/65-22.5	TN525		TND525	
18-22.5;445/65-22.5	TN535		TND535	

If your tire size is not shown on this table, Please email us, we can design and produce for you according to your tire size

ATLI Ladder Truck Chain-TPR/TPD



TPR (Cross Chain is Round link)



- * Core-hardened and galvanised.
- * The gripping unit features a ladder shape.
- * External latch External latching system ensuring an easier external locking of the chain.
- * Tensioning disc This devices ensures the correct tension of the chain at all times.



TPD (Cross Chain is D square)

Tire sizes	TN stock no.	Weight Per Pair	TND stock no.	Weight Per Pair
4.00-8;3.00-10	TPR131		TPD131	
4.50-8;3.50-10;100/90-10	TPR132		TPD132	
4.00-10;4.00-10Trak	TPR133		TPD133	
4.50-10	TPR134		TPD134	
5.00-10;4.00-12	TPR134B		TPD134B	
6.50-14;175-14;175/75-14;175/70-14	TPR135		TPD135	
7.00-14;185-14;185/75-14;195/70-14;6.40-15	TPR136		TPD136	
6.70-14;195-14;205-14;195/75-14;29x9-15;185-15;195-15;195/75-15;195/70-15;205/70-15;215/65-15;175-16;175/75-16;185/75-16	TPR137		TPD137	
7.50-14;215-14;215/75-14;6.70-15;205/75-15;215/75-15;225/75-15;215/70-15;225/70-15;8.60-16;6.40-16;185-16;195-16;195/75-16;235/60-16;8.00-16.5	TPR138		TPD138	
205/75-16;215/75-16	TPR138B		TPD138B	
7.00-15;215-15;235/75-15;255/70-15;225/60-15;255/60-15;6.50-16;205-16;205/80-16;225/70-16;235/70-16;245/70-16;7-17.5;225/75-16	TPR139		TPD139	
7.50-15;9-15;31x10.5-15;31x11.5-15;255/75-15;265/70-15;7.00-16;215-16;245/75-16;265/70-16;255/65-16;10x16.5;275/55-17;255/55-18;8-17.5;8.5-17.5;205/75-17.5;215/75-17.5;285/45-19;235/60-18	TPR140		TPD140	
8.40-15;10-15;10/75-15.3;7.50-16;235/85-16;7-19.5;245/70-17;225/75-17.5;235/75-17.5;245/70-17.5;	TPR141		TPD141	
8.25-15;7.00-18;9.5-17.5;6.50-20;275/70-16;265/75-16;255/85-16	TPR142		TPD142	
33x12.50-15;8.25-16;12-16.5;7.50-18;10-18;10.5-18;8-19.5;245/70-19.5;265/70-19.5;7.00-20;285/75-16	TPR143		TPD143	
9.00-16;8.25-17;10-17.5;9-19.5;9.5-19.5;285/70-19.5	TPR144		TPD144	
245/75-22.5;285/60-22.5;295/60-22.5;8.3-24;11.00-16;305/70-19.5;8.25-20;9C-20;9.5-20;9-22.5	TPR145		TPD145	
12.5-18;12.5/80-18;335/80-18;9.00-20;C22.5Pilote;10-22.5;275/70-22.5;295/70-22.5;305/60-22.5;315/60-22.5;9.5-24	TPR146		TPD146	
10.00-20;12/80-20;D20Pilote;11-22.5;D22.5Pilote;275/80-22.5;305/70-22.5;315/70-22.5	TPR147		TPD147	
11.00-20;13/80-20;E20Pilote;12-22.5;E22.5Pilote;12/80-22.5;315/80-22.5;315/75-22.5;305/75-24.5;315/75-24.5	TPR148		TPD148	
295/80-22.5	TPR148B		TPD148B	
12.00-20;14.5-20;11.00-22;13-22.5;10.00-24;385/65-22.5	TPR149		TPD149	

ATLI Truck Cable Chain



- * Snap lock fastening system for easy installation
- * Zinc plated rollers on cross members for corrosion resistance
- * Heavy truck model features heavy duty

Single Cable Chains



Dual-Triple cable chain

Single Light Truck Cable Chain

						Stock No.	Weight Per Pair	Cross Chains Per 1/2 Pair	Replacement
LR78-15	6.70-15LT 7.00-15LT	P215/75R15	195/75R15LT	7-17.5LT		2011	9	13	8819
7.50-17	245/70R17LT	225/70R17.5	7.00-18	8-19.5		2014	11	15	8821
215/75R14LT 9-14.5MH H78-15LT P225/75R15	P235/75R15 215/75R15LT 30X9.50-15 6.50-16LT	P225/70R16 P225/75R16 205R16 225/75R16LT	255/75R16LT 8.00-16.5 P235/60R17	P235/65R17 215/55R18 225/55R18 245/45ZR19		2016	9	12	8821
7.00-15TR 7.50-15LT P275/60R15 235/75R15LT 245/70R15LT	245/75R15LT 7.00-16LT 8.75-16LT 215/80R16LT 215/85R16LT	235/75R16LT 245/70R16LT 255/65R16LT 8.75-16.5 P235/70R17	235/65R17 8-17.5 8.50-17.5 215/70R17.5 P235/50R18	P255/45R18 225/65R18 235/60R18 235/65R18 225/55R19	245/55R19	2019	10	13	8821
NR78-15 7.50-15TR	275/60R15LT LR78-16LT	7.50-16LT 235/85R16LT	255/85R16LT 9.50-16.5LT	7.00-17LT 215/75R17.5		2021	10	14	8821
8.25-15TR	P275/70R16	245/70R19.5	P275/60R20	295/45R20	285/40R22	2028	12	14	8825
P245/65R15 P245/70R15 P255/70R15 P265/70R15 P265/75R15 255/75R15LT 29X9.50-15 P235/70R16	P245/70R16 P245/75R16 P255/65R16 P255/70R16 P275/60R16 P275/60R16 235/70R16LT 235/80R16 245/75R16LT	255/70R16LT 265/50R16LT 265/60R16 275/60R16LT 30X9.50-16 31X11.50-16 32X9-16LT 32X10.00-16LT	10-16.5 P235/75R17 P245/55R17 P245/65R17 245/65R17 P245/70R17 P255/55R17 P255/60R17	P255/65R17 225/75R17LT 275/55R17 P255/55R18 255/55R18 255/60R18 275/40ZR18 235/55R19	245/50R19 255/50R19 275/40ZR19 235/55R20 245/45R20 245/50R20 255/45R20 265/45R20	2029	10	12	8825


Single/Dual-Triple Heavy Truck Cable Chain

				Single			Dual-Triples			
Tire Sizes				Stock No.	Weight Per Pair	Cross Chains Per 1/2 Pair	Stock No.	Weight Per Pair	Cross Chains Per 1/2 Pair	Replacement Cross Chain
9.00-15TR 9.00-16LT 315/75R16LT	35X12.5-16 9R17.5 10R17.5	285/70R19.5 7.50-20 8-22.5	235/80R22.5 255/70R22.5	2037	14	14	N/A	N/A	N/A	8851
10.00-15TR QR78-16	11R17.5 8.25-20	9-22.5 245/75R22.5	275/70R22.5	2039	15	15	N/A	N/A	N/A	8851
9.00-20 10-22.5	255/80R22.5 265/75R22.5	275/80R22.5 295/75R22.5	305/70R22.5	2041	16	16	4041	31	32	8851
10.00-20	11-22.5	275/80R24.5	285/75R24.5	2045	17	16	4045	33	32	8853
10.00-22	12-22.5	12.5-22.5	11-24.5	2049	18	17	4049	36	34	8853

Wide Base Truck Cable Chain

						Stock No.	Weight Per Pair	Cross Chains Per 1/2 Pair	Replacement
10-15LT 265/70R15LT 265/75R15LT 305/50R15 31X10.50-15LT 33X10.50-15 P265/70R16	P265/75R16 245/85R16LT 265/70R16LT 265/75R16LT 265/80R16LT 275/70R16LT 295/50R16LT 235/80R17LT	245/75R17LT 255/60R17 P255/70R17 P265/65R17 P265/70R17 265/70R17LT P275/60R17 275/60R17	275/65R17 235/75R17.5 245/70R17.5 255/65R18 255/70R18 275/70R18 P265/65R18 275/55R18	P295/45R18 P255/60R19 265/50R19 275/45R19 275/55R19 225/70R19.5 255/50R20 255/55R20	265/50R20 275/40R20 275/45R20 295/40R20 265/40R22	3010	11	13	8825
PR78-15 11-15LT 31X11.50-15LT 32X11.50-15LT	33X9.50-15LT 33X13.50-15 34X9.50-15LT PR78-16	P285/60R16 275/65R16LT 285/60R16LT 32X11.50-16LT	33X13.50-16 34X9-16 12-16.5LT 31X10.50-16.5LT	285/60R17 285/70R17 305/45R17 P265/60R18	285/60R18 285/45R19 275/55R20 275/60R20 P285/50R20	3027	10	11	8853
12-15LT P315/70R15 325/60R15 31X13.5-15 32X12.50-15 33X12.50R15 33X14-15	33X14.50-15 35X14.5-15 11L16 285/70R16LT 295/75R16LT 305/70R16LT 305/85R16LT	35X13.5-16 36X13-16 32X12.50-16.5LT 33X12.5-16.5 33X15.5-16.5 275/70R17 285/75R17LT	295/70R17LT 305/70R17 33X12.50-17 10.50/80R18 275/70R18LT 285/65R18LT 285/75R18LT	295/70R18LT 325/60R18 33X12.5-18 33X13-18 275/65R20LT 285/55R20LT 305/50R20	305/55R20 32X11.50-20 33X12.5-20 285/50R22 305/40R22 305/45R22 33X11.5-22	3029	12	11	8859
355/80R20	13-22.5	15-22.5	385/65R22.5			3055	22	16	8813
425/65R22.5	445/50R22.5	455/55R22.5				3069	24	13	8815
445/65R19.5	16.5-22.5					3071	25	14	8815

Grader ,Equipment, Tractor, Off Road Vehicle Tire Chains

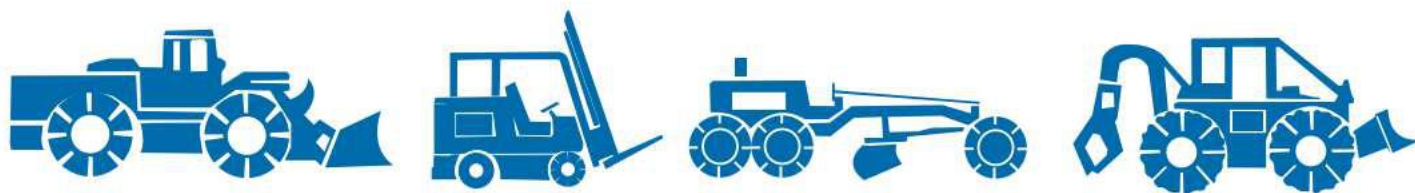

Grader & Equipment Chains



- Designed for plows, graders and loaders
- Heavy duty twist link cross chain
- Two-link spacing available upon request

Grader and
Equipment Chains 26'S



Reinforced Grader
and Equipment Chains 29'S

Tire Sizes					Grader Stock No.	Weight Per Pair	Replacement Cross Chain	V-Bar Grader Stock No.	Weight Per Pair	Cross Chains Per 1/2 Pair	Replacement Cross Chain
13.00-24	13.00-25	14.00-20	14.00-21	15.5-25	2612	107	6630	2912	118	14	6930
14.00-24	14.00-25				2615	123	6630	2915	145	16	6930
16.00-20	16.00-21	17.5-25			2624	166	6640	N/A	N/A	13	N/A
16.00-24	16.00-25				2627	189	6640	2917	170	15	6917
20.5-25					2633	202	6650	N/A	N/A	14	N/A
18.00-24	18.00-25	18.00-26			2636	211	6650	N/A	N/A	15	N/A
23.5-25					2645	365	6660	N/A	N/A	15	N/A
26.5-25	30.5R32	710/70R38	755/70R25	800/65R32	2657	447	6670	N/A	N/A	17	N/A

Double Ring Tractor Chains

Double ring cross chain design provides extra wear and self-cleaning action
Excellent for use in soft terrain, for off-road use only



Tire Sizes					Stock No.	Weight Per Pair	Cross Chains Per 1/2 Pair	Replacement Cross Chain
9.5-28	11.2-24				0736	91	12	204
9.5-32	11.2-28	12.5/80-18			0738	96	13	204
12.4-24					0752	105	12	206
12.4-28	13.6-24				0756	114	13	206
13.6-28					0759	130	15	206
11-38	11.2-44	12.4-40	12.4-42	13.6-38	0766	154	18	206
14.9-24					0772	132	12	210
14.9-28	16.9-24	18.4-16.1			0774	152	14	210
14.9-30	16.9-26	16.9-28	16.9-30	18.4-24	0777	163	15	210
19.5L-24	420/85R28							
14.9-38	15.5-38	16.9-34			0779	183	17	210
18.4-30					0785	195	16	211
16.9-38	18.4-34				0787	206	17	211
18.4-38					0789	218	19	211
20.8-38					0790	251	19	212

Tractor, Equipment & Off Road



Roadking Tractor Chains

- Suitable for off-road or over-the-road use



HP Tractor Chains

- Features H-pattern cross chains which keep the chain on top of the tire
- For off-road use only

Roadking Tractor Chains

Tire Sizes					Stock No.	Weight Per Pair	Cross Chains Per 1/2 Pair	Replacement Cross Chain
9.5-16	10-16.5	260/70R16			0829	53	9	6434
8.3-24	10.5/80-18	12-16.5	280/70R20	300/70R20	0822	62	11	6434
315/75D15								
7.2-24	9.5-24	12.5/80-18			0832	70	12	6434
9.5-28	11.2-24	15-19.5	340/80R18	355/80R20	0836	82	12	6445
360/70R20	380/70R20							
41x14.00-20	320/70R24				0852	91	13	6445
9.5-32	11.2-28	12.4-24	12.4-28	230/95R32	0838	95	14	6445
320/85R24								
230/95R36					0856	105	15	6445
13.6-16	14-17.5				0850	76	10	7420
13.6-24	13.6-26	380/70R24			0858	106	14	7420
13.6-28	14.9-24	360/70R28			0859	105	15	7420
14.9-26	14.9-28				0869	120	16	7420
16.9-24	17.5-24	17.5L-24	320/85R38		0874	123	15	7426
14.9-30	16.9-26	16.9-28	420/85R28		0876	130	16	7426
380/85R34					0877	142	17	7426
15.5-38	16.9-34				0879	150	18	7426
18.4-24	18.4-26	19.5L-24			0883	167	13	9562
18.4-28	540/65R30	550/65R25			0884	181	14	9562
16.9-30	18.4-30	21L-24			0885	191	15	9562
18.4-34	600/65R25				0887	205	16	9562
18.4-38					0889	217	17	9562
14.9-46	18.4-42	420/80R46			0894	250	19	9562

HP Tractor Chains

Tire Sizes					Stock No.	Weight Per Pair	Cross Chains Per 1/2 Pair	Replacement Cross Chain
9.5-24	9.5-28	11.2-24			Hp214	110	8	Hp292
9.5-32	11.2-28	230/95R32	355/80R20		Hp226	124	9	Hp292
10.5/80-18	12-16.5	280/70R20	300/70R20	315/75D15	Hp225	88	6	Hp293
12.4-24					Hp229	130	9	Hp293
9.5-36	9.5-38	11.2-32	12.4-28		Hp218	143	10	Hp293
13.9-36	320/85R34				Hp242	150	10	Hp294
13.6-24	13.6-26	14.9-24			Hp240	141	9	Hp295
14.9-26					Hp250	156	10	Hp295
14.9-28	14.9-30				Hp252	173	11	Hp295
13.6-28	16.9-24	320/85R38	340/85R28	380/85R34	Hp260	160	10	Hp296
14.9-38	15.5-38	320/90R46			Hp254	194	12	Hp296
17.5-24	17.5L-24				Hp263	135	8	Hp297
16.9-26	16.9-28	420/85R28			Hp262	169	10	Hp297
16.9-32					Hp266	184	11	Hp297
16.9-34	230/95R44				Hp270	200	12	Hp297
18.4-16.1	21.5L-16.1				Hp264	132	7	Hp298
18.4-24	19.5L-24				Hp268	171	9	Hp298
16.9-30	18.4-26	18.4-28	18.4-30	540/65R30	Hp271	188	10	Hp298
550/65R25	600/65R28							
18.4-34	480/85R34	600/65R25			Hp273	206	11	Hp298
16.9-38	18.4-38	20.8-34	380/90R50	420/80R46	Hp272	226	12	Hp298
460/85R34	480/80R38							
18.4-42	18.4-46	380/90R54	480/80R46		Hp277	221	16	Hp298
20.8-38					Hp276	259	13	Hp299
24.5-32	23.1-34	28.1-34	620/70R42	650/75R32	Hp282	252	12	Hp302



Forklift Chains

Tire Sizes	Stock No.	Weight Per Pair	Cross Chains Per 1/2 Pair	Replacement Cross Chain
6.50-10	FL2108	15	8	9311
7.50-10 7.00-12 25 X 8.50-14	FL2110	19	10	9311
7.00-15 28 X 9-15 29 X 8-15 27 X 8.50-15 28 X 9.50-15 8.15-15	FL2116	20	11	9311
7.50-15	FL2121	27	13	9311
250-15 27 X 10.50-15	FL2129	22	11	9313
8.25-15	FL2128	28	14	9313



ATV Chains

- Reinforced cross chain for increased wear and traction
- Two link spacing cross chain

Tire Sizes	Stock No.	Weight Per Pair	Cross Chains Per 1/2 Pair
23 X 8 X 11 24 X 8 X 11 26 X 8 X 12	ATV611	28	17
25 X 8 X 11 25 X 8 X 10	ATV612	31	19
22 X 11 X 8 22 X 12 X 8 22 X 11 X 10 22 X 10 X 10 23 X 10 X 10	ATV615	26	13
24 X 9 X 11 25 X 10 X 12 24 X 11 X 10 24 X 11 X 9 25 X 8 X 12	ATV618	37	19
25 X 13 X 9 25 X 13.5 X 9 25 X 12 X 9 25 X 12 X 10 24 X 12 X 10 24 X 13 X 9 24 X 13 X 12	ATV620	36	15



Snow Hawg/Snow Blower Chains

Tire Sizes	2 Link Spacing	
	Stock No.	Weight Per Pair
4.00 X 4.80-8	1302G	11
4.10 X 3.50-6	3310G	7
13 X 5-6	7156G	8
16 X 6.50 X 8	3315G	15

Snow Blower & Garden Tractor Chains


Tire Sizes	2 Link Spacing		4 Link Spacing	
	Stock No.	Weight Per Pair	Stock No.	Weight Per Pair
10/10.5 X 2.75 10.25 X 3.25 10 X 3.50	3301G	3	-----	-
12 X 3	3308G	4	-----	-
4.10/3.50 X 4 3.40/3.00 X 5	7106G	3	-----	-
4.10/3.50 X 5 4.10/3.50 X 6 12 X 3.50 X 6 12.25 X 3.50 X 6	3302G	4	-----	-
5.30/4.50 X 6	3309G	7	-----	-
13 X 5 X 6	7129G	6	-----	-
4.00/4.80 X 8	1301G	11	-----	-
5.00/5.70 X 8	3303G	16	-----	-
16 X 6.50 X 8 15 X 6.00 X 6	3300G	12	-----	-
18 X 6.50 X 8	3312G	14	-----	-
18 X 8.50 X 8	3307G	15	3311G	10
18 X 9.50 X 8	3305G	16	3306G	10
20 X 10 X 8 20 X 10 X 10	7145G	20	5320G	13
20 X 8.00 X 10 20 X 8 X 8	1308G	19	5318G	11
6 X 12 23 X 7.50 X 12	5313G	19	-----	-
8 X 12 23 X 8.50 X 12	4300G	22	4301G	13
12 X 12 26 X 12 X 12 27 X 12 X 12	5308G	30	5306G	18
23 X 9.50 X 12 23 X 10.50 X 12	5307G	25	5303G	15
24 X 12 X 12	7164G	25	-----	-
8 X 15 25 X 8.5 X 14 27 X 8.50 X 15	1307G	28	1309G	18
29 X 12 X 15	5323G	64	5316G	40
12.4-16 31 X 15.5 X 15 33 X 12.5 X 15	5324G	109	9100G	66
8 X 16	1311G	33	1310G	20

2 Link Spacing



4 Link Spacing

3.Sure grip - improves safety,most effective on packed and crusty snow.


CROSS CHAIN HOOKS

Stock No.	Material Size		Description
	Inches	mm	
177	3/16	.177	PASS. CAR (1100 & 1900)
230	13/64	.207	PASS. CAR (1200 & 1800)
236	15/64	.234	TRUCK & BUS HOOP
250	1/4	.250	LIGHT TRUCK
271	5/16	.312	MED. TRUCK
280	5/16	.312	FOR 7MM SQUARE WIRE
290	3/8	.375	HEAVY TRUCK
320	13/32	.406	TRACTOR
317	7/16	.437	GRADERS
314	13/32	.406	NU-WAY TRACTOR
315	5/16	.312	HEAVY TRUCK - FOR 7mm
330	1/2	.50	HEAVY EQUIPMENT
394	3/8	.375	HEAVY TRUCK - FOR 8mm
*451	7/16	.437	*9/0 SWIVEL HOOK
450	9/16	.536	11/0 SWIVEL HOOK


SIDE CHAIN REPAIR LINKS

Stock No.	Material Size	Description
015	3/16 X 1	PASSENGER CAR
035	1/4 X 1-1/4	LT. TRUCK, HEAVY PASS.
065	5/16 X 1-1/2	HEAVY TRUCK
085	3/8 X 1-5/8	TRACTOR
104	1/2 X 2-1/2	TRACTOR


**LINK CONTINUOUS CROSS CHAIN
- HARDENED**

Nominal Size	Material Diameter		Pitch Length
	Inches	Decimal	
3/0	13/64	0.207	0.920
.234	15/64	0.234	1.000
6/0	9/32	0.281	1.250
7/0	5/16	0.312	1.390
9/0 TRUCK	3/8	0.375	1.265
9/0 TRACTOR	3/8	0.375	1.650
11/0	7/16	0.437	1.563
14/0	17/32	0.531	1.734

PLATE-TYPE QUICK HOOKS

Stock No.	Material Size		Description
	mm	Decimal	
5404	6mm	.234	HEAVY TRUCK
5405	5mm	.187	MEDIUM OR HEAVY TRUCK


CROSS CHAIN REPAIR LINKS

Stock No.	Material Size		Description
	Inches	Decimal	
9333	13/64	.207	PASSENGER CAR
9253	1/4	.250	LIGHT SINGLE TRUCK
9263	9/32	.281	MEDIUM DUTY
9273	5/16	.312	HEAVY DUTY

QUICK HOOKS

Stock No.	Material Size		Description
	Inches	mm	
5401	1/4	.250	LIGHT TRUCK
5402	11/32	.344	MEDIUM TRUCK
5403	13/32	.406	HEAVY TRUCK


**STRAIGHT LINK SIDE CHAIN -
CONTINUOUS - UNHARDENED**

Nominal Size	Material Diameter		Pitch Length
	Inches	Decimal	
#1*	5/32	0.156	1.25
1/0*	11/64	0.177	1.250
2/0*	3/16	0.192	1.296
4/0	7/32	0.218	1.390
6/0	9/32	0.281	1.810
7/0 TRUCK	5/16	0.312	1.920
7/0 TRACTOR	5/16	0.312	2.127
9/0	3/8	0.375	2.170
11/0	7/16	0.437	2.330
	1/2	0.50	2.756



**Square Straight Link
Cross Chain - Continuous - Hardened**


Nominal Size	Material Diameter	Pitch Length
6/0	7mm	0.955
7/0	8mm	1.15
9/0	10mm	1.49
	11mm	1.565
	13mm	1.742


Side Chain Fasteners

Stock No.	Used With
5308F	PASSENGER, LIGHT TRUCK
5310F	TRACTOR CHAINS
713F	MEDIUM & HEAVY TRUCK
714F	HEAVY GRADER
6003	MEDIUM TRUCK - 6mm
6002	HEAVY TRUCK - 8mm
6004	HEAVY EQUIPMENT - 10mm


REPAIR PARTS, TOOLS & ACCESSORIES
Tire Chain Adjusters

Stock No.	Description
0215	PASS. CAR - RUBBER
0225	LIGHT TRUCK - RUBBER
0255	HEAVY TRUCK - RUBBER
9110	PASS. CAR - RUBBER ARM TYPE
9225	LIGHT TRUCK - RUBBER ARM TYPE
9229	HEAVY TRUCK - RUBBER ARM TYPE
0301	LIGHT TRUCK - SPRING
0302	HEAVY TRUCK - SPRING
0303	TRACTOR/GRADER - SPRING



Rubber Ring Tightener



Spring Tire Chain Adjusters



9250


2800-LH


Heavy Equipment Chain Tightening Tool

Stock No.	Length	Description
9250	19.75"	HEAVY TRUCK / EQUIPMENT

Replacement "L" Handles For Cam Chains

Stock No.	For Use With
2800-LH	HEAVY TRUCK
2801-LH	LIGHT TRUCK
8015-LH	TRUCK & BUS HOOP

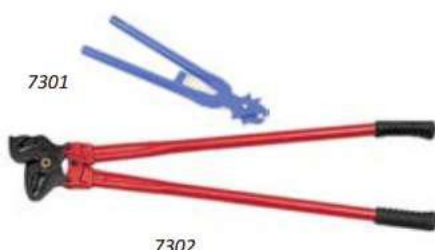

7301

7302

Chain Repair Pliers

Stock No.	Type - Length	Description
7301	SMALL - 6.5"	REG. PASSENGER
7303	LARGE - 18"	TRUCK
7302	X-LARGE - 33.5"	TRUCK/TRACTOR



Tire Size	Car 7/9/12	4x4/suv 11/16	Car Textil	4x4/suv Textil	Car/4x4 TPU	Car PL	Car Cable	Car/4x4 12/18	Tire Size	Car 7/9/12	4x4/suv 11/16	Car Textil	4x4/suv Textil	Car/4x4 TPU	Car PL	Car Cable	Car/4x4 12/18
31 10.5					150				155/70 14	40		81		40			
135 12	20				20				155/80 14	50		72					
135/80 12	20								165 14	60				80	1122/1922	1026	1217/1817
140 12	20				20				165/55 14	30		70					
140/80 12	20								165/60 14	30		71		30			
145 12	20				20	1110/1910		1206/1806	165/65 14	40		81		40	1114/1914	1018	1206/1806
145/70 12	20				20				165/70 14	50		81		50	1118/1918	1018	1217/1817
145/80 12	20					1110/1910		1206/1806	165/75 14	60		76		60	1118/1918	1018	1217/1817
150 12	30				20				165/80 14	60		77					1217/1817
150/80 12	30								175 14	80				80	1122/1922		1230/1830
155 12	30				30	1114/1914	1014	1206/1806	175/50 14	30				30			
155/70 12	20				30				175/60 14	40		71		40	1118/1918	1018	1217/1817
155/80 12	30							1206/1806	175/65 14	50		81		50	1118/1918	1018	1217/1817
165/60 12	20								175/70 14	60		72		60	1126/1926	1026	1230/1830
165/65 12	20								175/75 14	70		77		70	1122/1922	1022	1230/1830
165/70 12	30				20	1110/1910	1014	1206/1806	175/80 14	80		73	442		1022	1230/1830	
175/65 12	30								185 14	80	360			80			1230/1830
175/70 12	40				40	1114/1914	1014	1206/1806	185/50 14	40		70		40			
550 12	20								185/55 14	50		71		50	1118/1918	1018	
6.00 12								1206/1806	185/60 14	50		81		50	1126/1926	1026	1240/1840
135 13	20				20	1110/1910		1206/1806	185/65 14	60		72		60	1126/1926	1026	1230/1830
135/70 13	20				20				185/70 14	70		77		70	1126/1926	1022	1230/1830
135/80 13	20		70						185/75 14	80	360	78	442	80	1130/1930	1030	1230/1830
140 13					30				185/80 14	80		79	443		1130/1930	1030	1230/1830
140/80 13	30								195 14	90	370			90	1134/1934	1034	1240/1840
145 13	30				30	1114/1914	1014	1206/1806	195/40 14	30				30			
145/65 13	20				20			1210/1810	195/50 14	40				50			
145/70 13	20		70		20				195/55 14	50		81		50	1126/1926	1026	1217/1817
145/80 13	30		71			1114/1914	1014		195/60 14	60		72		60	1126/1926	1026	1230/1830
150 13	40								195/65 14	70		77		70	1126/1926	1030	1230/1830
150/80 13	40								195/70 14	80	360	78	442	80	1130/1930	1030	1240/1840
155 13	40				40	1114/1914	1014	1206/1806	195/75 14	80	370	79	443	80	1130/1930	1030	1240/1840
155/55 13						1110/1910			195/80 14	80		79	444				
155/60 13	20								205 14	100	380			100	1134/1934	1034	1254/1854
155/65 13	20		70		20				205/50 14			71					
155/70 13	30		70		20	1114/1914	1014	1206/1806	205/55 14	70		81		70	1126/1926	1026	1230/1830
155/80 13	40		81			1114/1914	1014	1217/1817	205/60 14	70		72		70	1130/1930	1026	1230/1830
160 13	50					1114/1914	1014		205/65 14	80	360	77		80			1230/1830
160/80 13	50								205/70 14	90	370	73	442	90	1130/1930	1030	
165 13	50				50	1118/1918	1018	1210/1810	205/75 14	100	380	79	444		1134/1934		
165/55 13	20				20				205/80 14	100		75	445				
165/60 13	30				30			1206/1806	215 14	120	390				1138/1938	1038	1250/1850
165/65 13	30		70		30	1114/1914	1018	1206/1806	215/40 14	50				50			
165/70 13	40		71		40	1114/1914	1014	1206/1806	215/55 14	70							
165/75 13								1217/1817	215/60 14	80	360			80	1130/1930	1030	
165/80 13	50		72			1118/1918	1018		215/65 14	90	370	77			1130/1930	1030	1254/1854
170 13	60				60				215/70 14	100	380	79	443	100	1134/1934	1034	1254/1854
170/80 13	60								215/75 14	100	390	75	444		1134/1934	1034	1254/1854
175 13	60				60	1122/1922	1026	1210/1810	215/80 14	120		80	445				
175/50 13	20				20	1114/1914	1014		225 14						1138/1938	1038	1250/1850
175/60 13	30		70		30	1114/1914	1014	1206/1806	225/40 14								1026
175/65 13	40		71		40				225/55 14	80		76		80			1230/1830
175/70 13	50		81		50	1118/1918	1018	1210/1810	225/60 14	90		78		90	1130/1930	1034	1254/1854
175/75 13	60					1118/1918	1018		225/65 14						1134/1934	1034	1254/1854
175/80 13	60		77			1122/1922	1026		225/70 14	110		74	444		1138/1938	1038	1254/1854
185 13	80				80	1126/1926	1026	1230/1830	225/75 14						1138/1938	1038	1250/1850
185/55 13	30		70		30				235/60 14	100	380	73		100	1134/1934	1034	1250/1850
185/60 13	40		71		40	1118/1918	1018	1210/1810	235/70 14			75	452		1138/1938	1038	1250/1850
185/65 13	50		81		50				245/50 14						1134/1934	1030	
185/70 13	60		72		60	1118/1918	1026		245/60 14	100	390	79	451		1138/1938	1038	1250/1850
185/75 13	70							1230/1830	245/70 14						1142/1942	1042	1250/1850
185/80 13	80		78			1122/1922	1022	1230/1830	255/55 14						1138/1938	1038	
185/85 13						1130/1930	1030		255/60 14						1138/1938	1038	
195 13						1130/1930	1030	1230/1830	265/50 14						1138/1938	1038	
195/45 13	30				30				265/60 14				452		1142/1942	1042	
195/50 13	40								275/60 14						1142/1942	1042	
195/55 13	40		70		40				560 14					50			
195/60 13	50		71		50	1126/1926	1026		6.00 14								1210/1810
195/65 13	60		81		60				7.00 14								1240/1840
195/70 13	70		72		70	1126/1926	1026	1230/1830	7.35 14								1230/1830
195/75 13						1130/1930	1030	1230/1830	7.50 14								1254/1854
200/60 13	60								7.75 14								1240/1840
205/50 13	50								125 15	30				30			
205/60 13	60		81		60	1126/1926	1026		125/80 15	30							
205/65 13	70		76		70			1230/1830	135 15	40				40	1118/1918	1014	1206/1806
205/70 13	80		77		80	1126/1926	1030	1230/1830	135/70 15	30		81		30			
215/50 13						1126/1926	1026	1210/1810	135/80 15	40		72					
215/60 13	70		76			1126/1926	1026	1230/1830	145 15	50				50	1118/1918	1018	1217/1817
215/65 13						1130/1930	1030	1230/1830	145/65 15	30		71		30			
225/55 13			81						145/70 15	40		81			1118/1918	1018	
225/60 13			76						145/80 15	50		77			1118/1918	1018	
235/50 13						1134/1934	1034		155 15	60				60	1122/1922	1022	1217/1817
235/60 13									155/60 15	40		71					
245/50 13						1134/1934	1034		155/65 15	40		81		40			
7.00 13								1230/1830	155/70 15	50		72		50	1118/1918	1018	
7.25 13						1230/1830			155/80 15	60		78			1122/1922	1022	
135 14	30				30			1206/1806	165 15	70				80	1122/1922	1022	1230/1830
135/70 14			70						165/50 15	30							
135/80 14	30		81						165/55 15	40							
145 14	40				40				165/60 15	50		81		50			
145/70 14	30		71			1114/1914	1014		165/65 15	5							



Tire Size	Car 7/9/12	4x4/suv 11/16	Car Textil	4x4/suv Textil	Car/4x4 TPU	Car PL	Car Cable	Car/4x4 12/18	Tire Size	Car 7/9/12	4x4/suv 11/16	Car Textil	4x4/suv Textil	Car/4x4 TPU	Car PL	Car Cable	Car/4x4 12/18
175/55 15	50		81		50				175/50 16			81					
175/60 15	60		72		60				175/55 16	60		76					
175/65 15	60		77		60				175/60 16	70		77					
175/70 15	70		78		70	1122/1922	1022	1230/1830	175/70 16			79	443				
175/75 15			73					1230/1830	175/75 16	90	370	74	444	90			
175/80 15	80	360	79	443					175/80 16	90		75	445				
180 15	90				90				185 16		390						
180/80 15	90								185/50 16	60				60			
185 15	90	370			90	1134/1934	1034	1240/1840	185/55 16	70		77					
185/45 15			70						185/65 16	80		79	443				
185/50 15	50		71		50				185/70 16		370						
185/55 15	60		81		60	1126/1926	1026	1217/1817	185/75 16		380	74	445				
185/60 15	70		72		70	1126/1926	1026		185/80 16				445				
185/65 15	70		77		70	1130/1930	1030	1230/1830	195 16		390						
185/70 15	80	360	73		80	1130/1930	1030	1230/1830	195/40 16	50		71		50			
185/75 15	90	370						1240/1840	195/45 16	60		81		60		1026	
185/80 15	90		74	444					195/50 16	70		76		70	1130/1930	1030	
195 15	100	380			100			1240/1840	195/55 16	80		77		80	1134/1934	1034	
195/45 15	50		71		50		1026		195/60 16	80		73		80			
195/50 15	60		81		60	1126/1926	1026	1230/1830	195/65 16	90	370	79	443	90			
195/55 15	70		72		60	1130/1930	1030	1230/1830	195/75 16		390	80	445				
195/60 15	80		77		70	1130/1930	1030	1230/1830	195/80 16				446				
195/65 15	80	360	73		80	1130/1930	1030	1240/1840	205 16		400			110	1134/1934	1038	
195/70 15	90	370	79	443	90	1130/1930	1034	1240/1840	205/40 16	60		81				1026	
195/75 15	90	380	74	444	100	1134/1934	1034	1240/1840	205/45 16	70		76		70		1026	
195/80 15	100		75	445				1254/1854	205/50 16	80		77		80	1130/1930	1030	1230/1830
200/60 15	80				80				205/55 16	90	360	78		90	1134/1934	1034	1240/1840
205 15						1138/1938	1038	1254/1854	205/60 16	90		79	443	90	1134/1934	1034	1240/1840
205/45 15	60						1026		205/65 16	100	380	74	444	100	1134/1934	1034	1254/1854
205/50 15	70		76		70	1126/1926	1026	1230/1830	205/70 16		390	75	445				
205/55 15	80		77		70	1134/1934	1034	1230/1830	205/75 16				446				
205/60 15	80		78		80	1130/1930	1030	1230/1830	205/80 16				447				
205/65 15	90	370	79	443	90	1134/1934	1034	1240/1840	215 16								
205/70 15	100	380	74	444	100	1134/1934	1034	1240/1840	215/40 16	70		81		70		1026	
205/75 15	100	380	75	445		1138/1938	1038	1254/1854	215/45 16	80		76					
205/80 15	120	390							215/50 16	80	360	77		80	1134/1934	1034	
215 15		400			110			1250/1850	215/55 16	90		73		90	1134/1934	1034	1240/1840
215/45 15	70		81						215/60 16	100	380	79	444	100	1138/1938	1034	1254/1854
215/50 15	80		76		90	1130/1930	1030		215/65 16	110	390	74	445	100	1138/1938	1038	1254/1854
215/55 15	80		77			1134/1934	1034		215/70 16	130	390	80	446	120	1138/1938	1038	
215/60 15	90	370	73		90	1134/1934	1034	1254/1854	215/75 16		410		447	110	1142/1942	1042	
215/65 15	100	380	79	443	100	1134/1934	1038	1254/1854	215/80 16				448	120			
215/70 15	100	390	74	445	100	1138/1938	1038	1254/1854	215/85 16		450		449				
215/75 15	120	400	80	446	100	1138/1938		1250/1850	225/40 16	80		76		80			1240/1840
215/80 15				447					225/45 16	80		77		80			1254/1854
225 15					120			1250/1850	225/50 16	90		78		90		1034	1254/1854
225/50 15	80		77		80	1134/1934	1030	1240/1840	225/55 16	100		79	443	100	1138/1938	1038	1254/1854
225/55 15	90		78		90	1134/1934	1034	1240/1840	225/60 16	110		74	444	110	1138/1938	1038	1250/1850
225/60 15	100	380	79	443	100	1138/1938	1038	1254/1854	225/65 16	130	400	80	445	1038	1138/1938	1038	1250/1850
225/65 15	110		74	444	100	1130/1930	1030	1254/1854	225/70 16		410		446	110			1250/1850
225/70 15	120	390		445		1138/1938	1038	1250/1850	225/75 16		410		448	120			
225/75 15		400	80	446	110			1250/1850	235/50 16	100		73		100	1134/1934	1038	1254/1854
225/80 15				447				1250/1850	235/55 16	110		79	451		1134/1934	1034	
230 15									235/60 16	130	400	75	453	120			1250/1850
230/60 15	100				100				235/65 16				446		1142/1942	1042	
235 15						1142/1942	1042		235/70 16		410		447	120			
235/45 15			76						235/75 16					130			
235/55 15	100		73		100				235/80 16		460		449				
235/60 15	110		79	444	100	1138/1938	1038	1254/1854	235/85 16		480		450				
235/65 15						1138/1938	1038	1250/1850	245/45 16	100		78		100		1034	1254/1854
235/70 15	130	400		446		1142/1942	1042	1250/1850	245/50 16	110			451		1142/1942	1042	1250/1850
235/75 15		410		447	120			1250/1850	245/55 16	130		74	452		1142/1942	1042	
245/50 15			78			1138/1938	1038		245/60 16	130		80	453				1250/1850
245/60 15	130		74	452		1142/1942	1042		245/70 16		450		448	130			
245/70 15				447					245/75 16		460		449	140			
245/75 15				448					255/35 16			76					
255/45 15	90		77						255/40 16			77					
255/55 15						1142/1942	1042		255/50 16	120			451		1142/1942	1042	
255/60 15		400	75	453		1142/1942	1042		255/55 16			75	453				
255/65 15				446		1142/1942	1042		255/60 16				446				
255/70 15		450		447					255/65 16		450		447	130			
255/75 15		460	75	448					255/70 16		460		448				
265/50 15						1142/1942	1042		255/75 16		480						
265/60 15						1142/1942	1042		265/50 16				452				
265/65 15		450							265/65 16					140			
265/70 15		460		448	140				265/70 16		480		449	150			
265/75 15		480		449					265/75 16		470		450				
275/50 15						1142/1942	1042		275/60 16				447				
275/55 15				452					275/70 16		470		450	150			
275/60 15		450		446					285/65 16				449				
285/50 15				452					295/50 16				453				
285/70 15		470							6.00 16								1254/1854
295/50 15				452					825 16								
305/50 15				453					8.00 16.5								1250/1850
5.60 15								1210/1810	175/55 17			77					
6.40 15								1230/1830	185/60 17	80		79	443	80			
6.50 15								1240/1840	185/65 17			74	444				
6.70 15								1240/1840	185/70 17			75	445				
7.00 15					120				195/40 17			76					
7.35 15								1240/1840	195/45 17			77					
825 15		490							205/40 17	70		76				1026	
155/60 16								1230/1830	205/45 17	80		77		80		1030	



Tire Size	Car 7/9/12	4x4/suv 11/16	Car Textil	4x4/suv Textil	Car/4x4 TPU	Car PL	Car Cable	Car/4x4 12/18	Tire Size	Car 7/9/12	4x4/suv 11/16	Car Textil	4x4/suv Textil	Car/4x4 TPU	Car PL	Car Cable	Car/4x4 12/18
205/75 17		410		448					265/55 18				448				
215/35 17			81						265/60 18		480		449				
215/40 17	80		77		80		1030		275/35 18				451		1042		
215/45 17	80		78		80		1034	1240/1840	275/40 18				452				
215/50 17	100		79		100	1138/1938	1038	1240/1840	275/45 18				446				
215/55 17	100	380	74	444	100	1138/1938	1038		275/50 18				447				
215/60 17	110	390	75			1138/1938	1038		275/60 18				449				
215/65 17						1142/1942	1042		285/35 18				451				
215/70 17				447					285/40 18				452				
215/75 17		450							285/45 18				454				
215/85 17					130				285/50 18				454				
225/35 17			76						285/55 18				449				
225/40 17	80		77		80				285/60 18		490		450				
225/45 17	90		78		90		1034	1240/1840	295/35 18				452				
225/50 17	100		79	443	100	1138/1938	1038		295/40 18				453				
225/55 17	120	390	74		120	1138/1938	1038		295/45 18				454				
225/60 17	130		80	445	120	1142/1942	1042		700 18		490						
225/65 17	130	410				1142/1942	1042		750 18		490						
225/70 17		410		448					215/65 19		450						
225/75 17		460							225/40 19	100		444					
235/40 17	90		77		90		1034		225/65 19		460						
235/45 17	100		73		100		1038	1254/1854	235/35 19	100							
235/50 17	110		79	451	110		1038		235/40 19	110		452	100				
235/55 17	130	400	75	453		1138/1938	1042		235/45 19	130		453					
235/60 17	130			446					245/35 19	110		451					
235/65 17		410		447					245/40 19	130		452			1042		
235/70 17				448	130				245/45 19			446					
235/75 17		480							245/50 19			447					
245/35 17			76				1034		245/65 19		480						
245/40 17	100		78		100		1034	1254/1854	255/35 19	120		451			1042		
245/45 17	110		79	451	110		1038		255/40 19			453					
245/50 17	130		74	452		1142/1942	1042		255/45 19			446					
245/55 17			80	453					255/50 19		450	447					
245/60 17				447					255/55 19		460	448					
245/65 17		450		448					265/35 19			452					
245/70 17				449					265/50 19		460						
255/40 17	110				110		1038		265/55 19			449					
255/45 17	120			451	120	1142/1942	1042		275/35 19			452					
255/50 17			75	453					275/40 19			446					
255/55 17				446					275/45 19			447					
255/60 17		450		447					275/50 19			448					
255/75 17		490							275/55 19			449					
265/40 17	120								285/30 19			451					
265/55 17		450							285/35 19			452					
265/60 17		460		448	150				285/40 19			454					
265/65 17		480		449					285/45 19		460	447					
265/70 17		470		450					285/55 19			450					
275/40 17	130			451			1042		295/30 19			451					
275/45 17				452					295/35 19			453					
275/50 17				446					305/30 19			452					
275/55 17		460		447					8 19		490						
275/60 17				448					245/35 20			452			1042		
275/65 17				450					245/40 20			446					
285/40 17				451					255/30 20			451					
285/60 17				449					255/35 20			453					
295/40 17				452					255/50 20			448					
295/45 17		450							255/55 20		480						
9.5 17		490							265/35 20			453					
205/35 18							1026		265/45 20			448					
205/40 18			77						265/50 20			449					
205/45 18			73						275/30 20			452					
205/55 18			75	445					275/35 20			453					
215/35 18			77				1030		275/40 20			447					
215/40 18	90		78	442	90		1034		285/30 20			452					
215/45 18	100		79	443			1034		285/40 20			447					
215/50 18			74	444					285/50 20			450					
215/75 18				449					295/25 20			451					
225/35 18			77						295/40 20			448					
225/40 18	90		73		90		1034	1240/1840	295/45 20			449					
225/45 18	100		79	443	100	1138/1938	1038		650 20		490						
225/50 18			76	445		1138/1938	1038		700 20		490						
225/55 18		400							245/35 21			446					
225/60 18				447					255/35 21			446					
235/35 18			77						255/50 21			450					
235/40 18	100		79		100		1038		285/30 21			453					
235/45 18	110		74				1038		285/35 21			447					
235/50 18	130	400	75	453			1042		285/45 21			450					
235/55 18	130	410		446			1042		265/30 22			446					
235/60 18		410		447					265/35 22			448					
235/65 18				448					285/30 22			447					
240/45 18	120								285/35 22			448					
245/35 18			78					1254/1854	295/25 22			453					
245/40 18	110		79		110		1038		305/35 23			450					
245/45 18	120		75	452	120	1142/1942	1042		150/65 345			20		1118/1918	1018		
245/50 18	130		79	446		1142/1942	1042		165/70 360					1118/1918	1018		
245/55 18				447					165/70 365					1126/1926	1026		
255/30 18			77						185/65 365								
255/35 18	100								185/70 365								1230/1830
255/40 18	120			451	120		1042		180/65 390					1126/1926	1026		1230/1830
255/45 18			75	453			1042		185/65 390								1230/1830
255/50 18				446	110				190/65 390					1130/1930	1030		1240/1840
255/55 18		450		447					200/60 390								1230/1830
255/60 18				448					220/55 390					1134/1934	1034		
265/35 18	120								220/65 390					1138/1938	1038		
265/40 18			74	452					225/55 390								1240/1840